



F&F Filipowski sp. j.
ul. Konstytucyjna 79/81
95-200 Pabianice POLAND
tel/fax 48 42 2270971
e-mail: fif@fif.com.pl

BIS-402

ELECTRONIC BI-STABLE PULSE RELAY




www.fif.com.pl

F&F products are covered by an 24 months warranty from date of purchase

PURPOSE

Electronic bi-stable pulse relays BIS-402 enables the user to actuate lighting or other devices from various locations by means of control buttons in parallel connection.

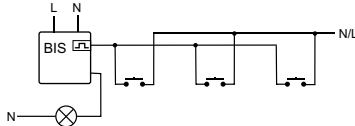

FUNCTIONING

The receiver is actuated by means of a current pulse triggered by pushing any bell push connected to the relay. The receiver is deactivated by another pulse or after a preset time.


ATTENTION!

The BIS-402 is not compatible with bell pushes equipped with fluorescent lamps.

TECHNICAL DATA

supply	230V AC
current load	<10A
controlling current	<1mA
activation delay	0,1+0,2sec
power consumption	0,4W
connection	4×DY 1mm ² ; l=10cm
working temperature	-25÷50°C
dimensions	Ø55, h=13mm
fixing	to under plaster box Ø60

WIRING DIAGRAM

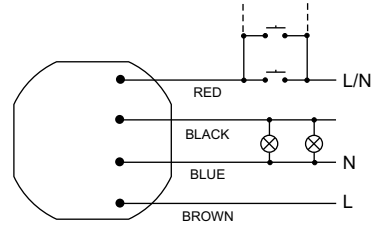

A090615