

MPUUV analog coupler component IN: 0..10 V - OUT: 0..10 V / 300 mA

INPUT: 0...10 V DC

OUTPUT: 0...10 V DC/300 mA

Screw terminals

Image



- Input and output galvanically separated

Technical Data

Operating voltage range	24 V DC \pm 20 %, smoothed
Operating current	max. 300 mA
Input frequency	max. 1 kHz
Output current	max. 20 mA
Tolerance	\leq 0.5 %
Temperature range	0...+50 °C
Dimensions H x W x D	86 x 67.5 x 86 mm

Input

Input resistor	approx. 12 kOhm
----------------	-----------------


Commercial data

Gross weight	171
Net weight	171
Weight unit	gram
Basic unit	pc.
Customs tariff number	85437090
Unit (piece)	1
Limited value	1

Comments

This product must only be used as component for processing by authorized manufacturers or persons.

Circuit diagram

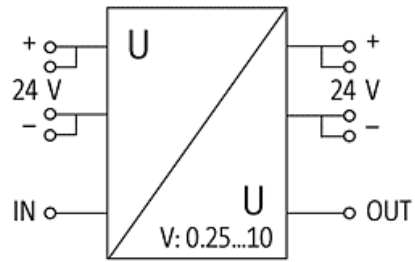

Regular voltage amplification

Dimension drawing

