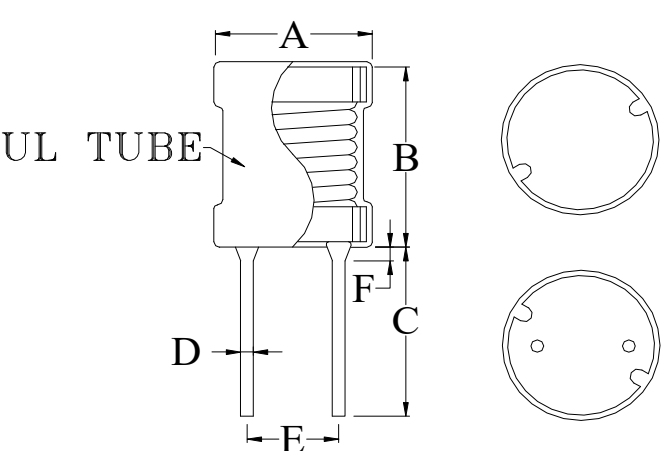


| | | | |
|-----------|---------------|----------|---------------|
| COMMODITY | PK CHOKE | SPEC NO. | SP-0160325010 |
| ITEM | COIL1010-0.82 | Green | |

| (1) DIMENSION: (UNIT: mm) | | DIM. | TOL. |
|---|---|------|------|
|  | A | 11.5 | MAX. |
| | B | 11.5 | MAX. |
| | C | 16.0 | ±3.0 |
| | D | 0.8 | ±0.1 |
| | E | 5.0 | ±0.5 |
| | F | 3.0 | MAX. |
| | G | | |
| | H | | |
| | I | | |
| | J | | |

| (2) ELECTRICAL CHARACTERISTIC | | | TEST INSTRUMENTS. |
|-------------------------------|------------|-----|--|
| INDUCTANCE | 820 ± 10% | μ H | <input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer. |
| TEST FREQUENCY | 1 | KHz | <input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter. <input type="checkbox"/> HP-4286A RF L.C.R. Meter. |
| TEST VOLT | 0.25 | V | <input checked="" type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer. |
| RDC | 1.24 (max) | Ω | <input type="checkbox"/> ZENTECH 101 L.C.R. Meter. <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. |
| Isat | 0.5 (max) | A | <input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT. |
| Irms | 0.8 (max) | A | <input checked="" type="checkbox"/> ZENTECH 502AC Resistance Merter. <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter. |
| | | | |

REMARK :

1. Inductance drop = 10% typ at Isat.
2. ΔT = 40°C rise typ at Irms.