



General technical data

Operating range factor / of control voltage_1		0.8
Adjustable pickup delay time / initial value	s	0
Measurable voltage / at AC / initial value	V	400
Switching voltage / of the contacts / at AC / minimum	V	10
Switching current / at AC / per contact / minimum	mA	100

Voltage

Type of voltage / for actuation		AC
Rated insulation voltage U_i / between spool contact	kV	4
Measurable voltage / at AC / Full-scale value	V	400
Surge voltage resistance / between contacts of the relay operating mechanism	kV	2.5

Dissipation

Rated power loss P_v		9VA (Electronic) ; 0,2VA (contact)
Operating voltage / at AC / rated value	V	250
Operating current / rated value	A	4

Control current

Control supply voltage		
------------------------	--	--

• at DC / rated value / minimum	V	0
• at DC / rated value / maximum	V	0
• at AC / at 50 Hz / rated value / minimum	V	400
• at AC / at 50 Hz / rated value / maximum	V	400
• at AC / at 60 Hz / rated value / minimum	V	400
• at AC / at 60 Hz / rated value / maximum	V	400

Auxiliary circuit

Number of CO contacts / for auxiliary contacts		1
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0

Adjustable parameters

Adjustable pickup delay time / Full-scale value	s	0
Adjustable OFF-delay time		
• initial value	s	0
• Full-scale value	s	0

Product function

Product function		
• Phase unbalance		No
• Phase failure detection		No
• phase sequence recognition		Yes
• Overvoltage detection		No
• undervoltage detection		No

Number

Number of terminals / with cross-head screw		1
---------------------------------------------	--	---

Connections

Type of electrical connection		screw-type terminals
• Plug-in socket		No

Mechanical Design

Height	mm	90
Width	mm	18
Depth	mm	64
Required spacing / between contacts of the relay operating mechanism	mm	4
Net weight	g	80

Environmental conditions

Ambient temperature		
• during operation / minimum	°C	-20

General Product Approval	Declaration of Conformity	other
--------------------------	---------------------------	-------



[Umweltbestätigung](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5TT3423>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TT3423/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT3423

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

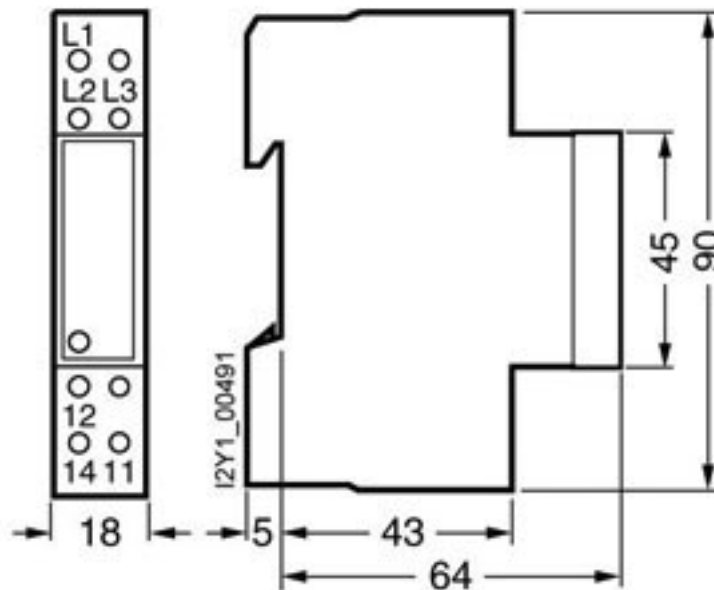

last modified:

09/13/2016