


Level switch WP-3M

MikroBest

www.mikrobest.pl

Relay for monitoring levels in wells, basins, tanks...

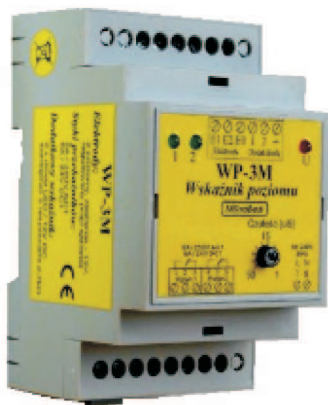

General characteristics

- Electronic relay for monitoring level of liquid
- 2 relays output with changeover contacts (2 x SPDT)
- 2 green LEDs for relays state
- Red LED for supply voltage
- Modular housing; rail 35mm mounting

Technical parameters




| | |
|--------------------|---------------------------|
| Supply terminals: | 230 V; 50Hz |
| Consumption: | max 3VA |
| Current rating: | 6A/250V AC1 6A/24V DC1 |
| Protection degree: | IP40 |
| Dimensions: | 90 x 57 x 52mm |

Function

Relay is designated for monitoring of levels of conductive liquids.

The device monitors levels by using 3 probes (include one common).

In case you use a tank made of a conductive material, you can use it as a probe E0.

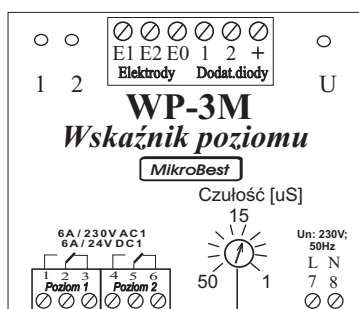

sensitivity adjustment

