

Multifunction time relay TRAh 230 VAC




www.mikrobest.pl

**Multifunction time relay.
Multiscale. Multivoltage.
1 relay output DPDT**

General characteristics

- Electronic time relay, multiscale
- 1 relay output with 2 changeover contact (DPDT)
- Green LED indicator for relay state
- Mounting 11-pin socket

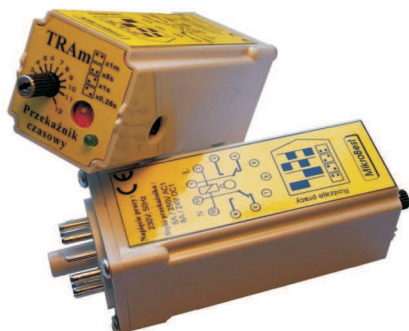

Order code	Time of scale range	Rated auxiliary supply voltage	Qty per pkg
TRAh 230 VAC	15s-12h	V 230 VAC	1

Function

On delay (Power on)

When the input voltage U is applied, timing delay t begins. Relay contacts R change state after time delay is complete. Contacts R return to their shelf state when input voltage U is removed.

Interval (Power off)



When the input voltage U is applied, relay contacts R change state immediately and timing cycle begins. When the time delay is complete, contacts return to shelf state. When input voltage U is removed, contacts will also return to their shelf state.

Repeat Cycle (Starting off)

When the input voltage U is applied, time delay t begins. When time delay t is complete, relay contacts R change state for time delay t. This cycle will repeat until input voltage U is removed.

Repeat Cycle (Starting on)

When the input voltage U is applied, relay contacts R change state immediately and time delay t begins. When the time delay t is complete, contacts return their shelf state for time delay t. This cycle will repeat until input voltage U is removed.

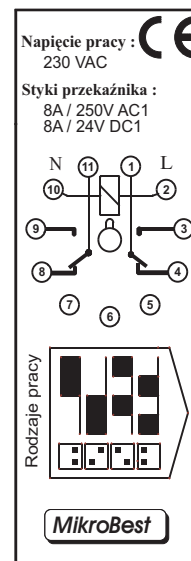

Time rangers

- x1h
- x8m
- x1m
- x15s



Technical parameters

- Supply terminals: (pin: 2..10) 230 VAC
- Supply voltage tolerance: 0,8 - 1,1 %
- Consumption: max 8VA
- Current rating: 8A/250V AC1, 8A/24V DC1
- Time deviation: 5%
- Protection degree: IP20
- Dimensions: 105 x 35 x 35mm

