

Multifunction time relay TRAm 8-pin 24 VAC/DC




www.mikrobest.pl

Multifunction time relay. Multiscale. Multivoltage. 1 relay output DPDT

General characteristics

- Electronic time relay, multiscale
- 1 relay output with 2 changeover contact (DPDT)
- Green LED indicator for relay state
- Mounting 8-pin socket

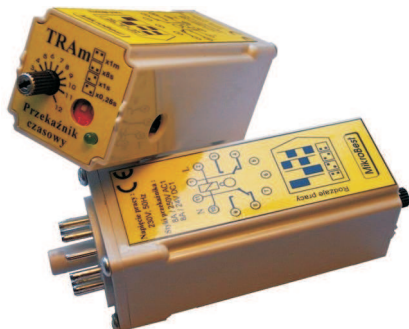

Order code	Time of scale range	Rated auxiliary supply voltage	Qty per pkg
TRAm 8-pin 24VAC/DC	0,25s-12m	V 24 V AC/DC	1

Function

On delay (Power on)

When the input voltage U is applied, timing delay t begins. Relay contacts R change state after time delay is complete. Contacts R return to their shelf state when input voltage U is removed.

Interval (Power off)



When the input voltage U is applied, relay contacts R change state immediately and timing cycle begins. When the time delay is complete, contacts return to shelf state. When input voltage U is removed, contacts will also return to their shelf state.

Repeat Cycle (Starting off)

When the input voltage U is applied, time delay t begins. When time delay t is complete, relay contacts R change state for time delay t. This cycle will repeat until input voltage U is removed.


Repeat Cycle (Starting on)

When the input voltage U is applied, relay contacts R change state immediately and time delay t begins. When the time delay t is complete, contacts return their shelf state for time delay t. This cycle will repeat until input voltage U is removed.

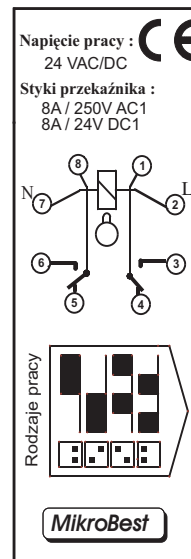

Time rangers

	x1m
	x8s
	x1s
	x0,25s



Technical parameters

Supply terminals:	(pin: 2..7) 24 VAC/DC
Supply voltage tolerance:	0,8 - 1,1 %
Consumption:	max 8VA
Current rating:	8A/250V AC1 8A/24V DC1
Time deviation:	5%
Protection degree:	IP20
Dimensions:	105 x 35 x 35mm

