


STATIC FILAMENT | LED STACK BEACON



BEACON

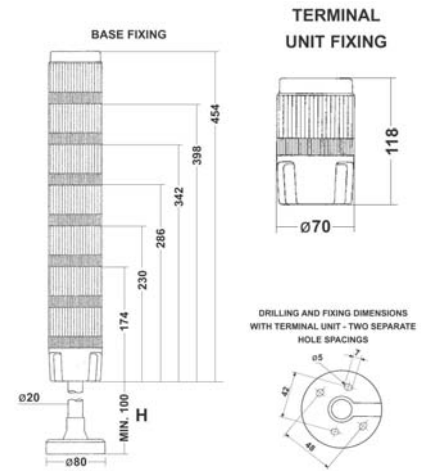

FILAMENT | LED Tower Light Series > Product overview

A simplistic but robust tower or stack light. The TLM range offers a steady signal. The units offer a choice of five lens colours plus sounder

module option. The lenses have been designed to accommodate a standard Ba15d lamp fitting or LED cluster. The modules offer easy assembly and provide an effective signal.

Features

- Steady signal
- Lamp determines voltage
- Sound module option
- Up to 7 module construction
- LED Cluster or Incandescent options
- Easy assembly

Material

UV Stable Polycarbonate Plastic

Code No:	Colour:	Voltage:	Light Source:
TLM-01	Amber	12-240v Ac/Dc	LED Cluster or Incandescent Type
TLM-02	Red	12-240v Ac/Dc	LED Cluster or Incandescent Type
TLM-03	Blue	12-240v Ac/Dc	LED Cluster or Incandescent Type
TLM-04	Green	12-240v Ac/Dc	LED Cluster or Incandescent Type
TLM-05	Clear	12-240v Ac/Dc	LED Cluster or Incandescent Type

• Incandescent 5 Watt max

TLM-AUD 24	Audible Buzzer	24v Ac/Dc	20mA	90dB @ 1 Metre
TLM-AUD 230	Audible Buzzer	230v Ac/Dc	20mA	90dB @ 1 Metre
TLM-BC	Mounting Cap & Base			
TLM-P100	Foot & Pole			

LED Lamps (24v Dc Ba15D)
M00267 Amber | M00268 Red | M00269 Green | M00270 Blue | M00271 Clear

LED Lamps (230v Ac Ba15D)
M00277 Amber | M00278 Red | M00279 Green | M00280 Blue | M00281 Clear



Kg 0.35 per module

°C -20+50

IP 54

ADD THE FOLLOWING LENS CODES TO THE PRODUCT CODE WHEN ORDERING

01 02 03 04 05

APPROVAL AND CONFORMITIES



EEC REGULATION 72/23 LOW VOLTAGE, EEC 94/68 | EN60947.5-1 | EN60073 | EN60068-2-6 | EN457 | EN981 | IEC536 | EEC REGULATION 89/336 ELECTROMAGNETIC COMPATIBILITY