


Visual Signals XENON

BEACONS

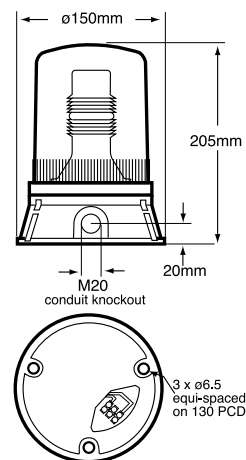

Industrial Xenon Beacons > X401-400 Series

Product overview

The X401/400 Din Base Series utilises a discharge capacitor and converter circuit to ignite xenon gas inside a tube, resulting in a brilliant flash of light. Xenon gas ignites virtually instantaneously so maximum brightness is obtained immediately. Xenons have an added advantage of low current consumption combined with a reasonable life span. The X401/400 Series provides a 360-

degree light output and has a Single Flash or Double Flash option. The Double Flash option extends the signal duration making it more noticeable to the human eye. Brightness is increased by the use of a Dioptic (Fresnel) lens which magnifies the light output. This series also incorporates both bottom and side entry cabling access and mounting is achieved via external three point fixing. Xenon beacons are one of the most efficient, effective and brightest visual signals available.

Features

Continuously rated

Suitable for surface or wall mounting

Optional wall bracket & protective guard available - see accessory page

360° visibility

Single or double flash option

Diode polarised [DP] options available for fire alarm systems

M20 side or bottom cable entry

IP65

Material

UV Stable Polycarbonate Lens
UV Stable ABS Plastic Base

Code No:	Voltage:	Light Source:	Current:
X401-18•	12/24v Dc ---	Xenon 10J/7.5J	1.45/0.7 A
X401-19••	12/24v Dc ---	Xenon 10J/7.5J	1.45/0.7 A
X400-88	24v Ac ~	Xenon 10J/7.5J	0.72 A
X400-89•	48v Ac ~	Xenon 7J/5J	0.37 A
X400-21	115v Ac ~	Xenon 10J/7.5J	0.10 A
X400-22	230v Ac ~	Xenon 10J/7.5J	0.06 A

- Pre-set at 24v Dc ---
- Diode polarised
- Ambient Temperature Range -25°C to +35°C



Kg 0.82

50/60 **Hz**

°C -25+66

IP 65

FPM 60x90

INDUSTRIAL

APPROVAL AND CONFORMITIES



ADD THE FOLLOWING LENS CODES TO THE PRODUCT CODE WHEN ORDERING

01

02

03

04

05



FIRE