


Opto Plus LED Corp.
0.56" SMD Type LED Display
OPS-S5620PG-GW
OPS-S5621PG-GW

● **EDIT HISTORY**

Version A: Mar. 05, 2015

Preliminary spec.

| Manufacture | Examination | Approving |
|-------------|-------------|-----------|
| | | |

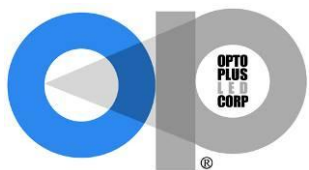

Opto Plus LED Corp.
0.56" SMD Type LED Display
OPS-S5620PG-GW
OPS-S5621PG-GW

● **FEATURES**

- 0.56 inch (14.20 mm) Digit Height.
- SMD type.
- Low current operation.
- Gray face, White segment.
- RoHS compliant, Pb Free.

● **DESCRIPTION**

The OPS-S5620PG-GW & OPS-S5621PG-GW are 0.56 inch (14.20 mm) height Single digit 7-segment displays.

This device utilizes Pure Green chip which are made from InGaN on a transparent GaN, substrate.

The display has Gray face, White segment.

● **DEVICE**


| PART NO | DESCRIPTION |
|----------------|----------------|
| OPS-S5620PG-GW | Common Anode |
| OPS-S5621PG-GW | Common Cathode |

RoHS Compliance



Pb free.



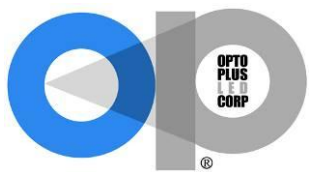


Opto Plus LED Corp.

0.56" SMD Type LED Display


OPS-S5620PG-GW

OPS-S5621PG-GW

● MECHANICAL DIMENSIONS

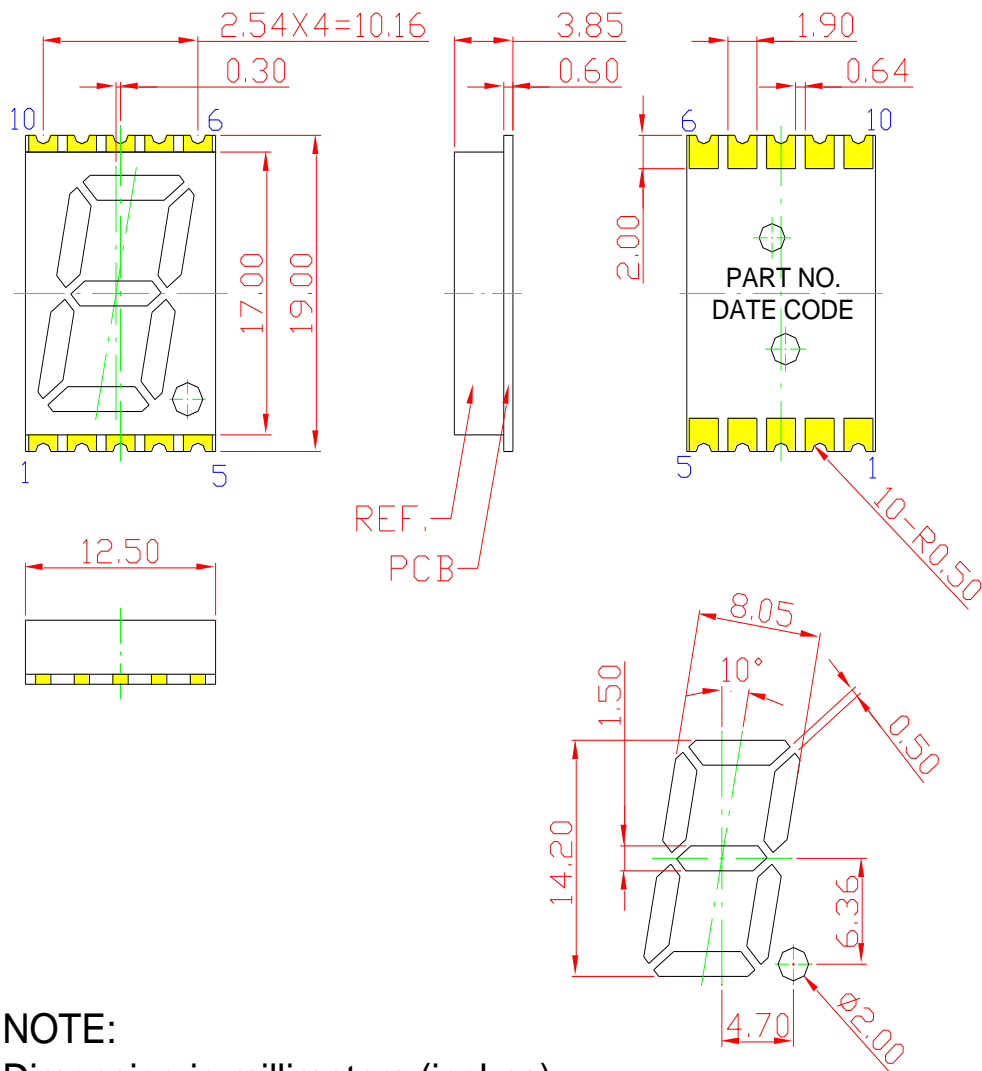



NOTE:
Dimension in millimeters (inches),
and tolerances are $\pm 0.25\text{mm}$ (.01") specified.

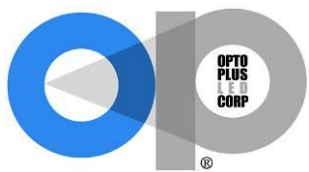


Opto Plus LED Corp.
0.56" SMD Type LED Display
OPS-S5620PG-GW
OPS-S5621PG-GW

● **TYPICAL INTERNAL EQUIVALENT CIRCUIT**


Recommended
Soldering Pattern

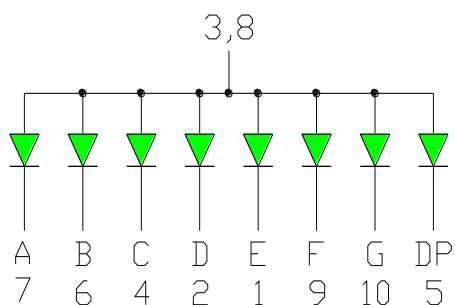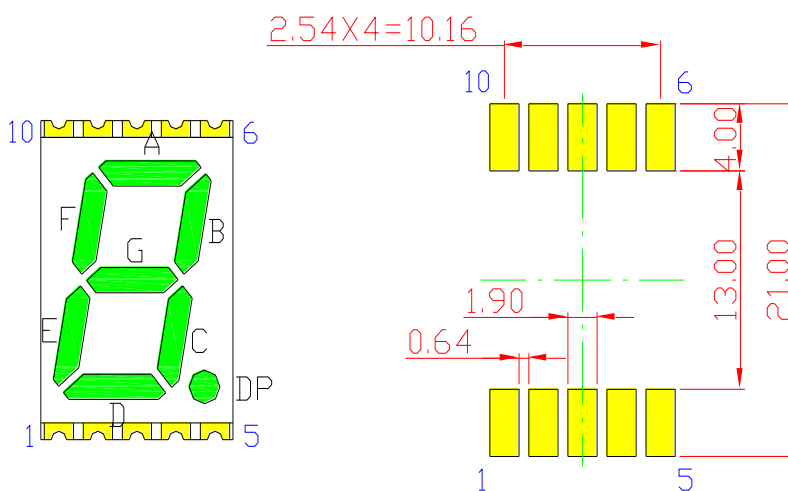

OPS-S5620PG-GW
 (Common Anode)

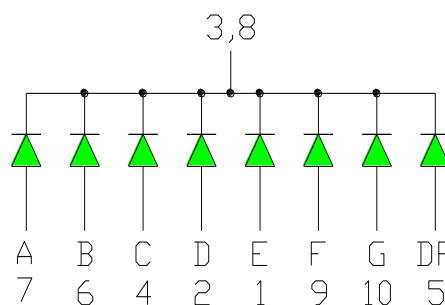

OPS-S5621PG-GW
 (Common Cathode)

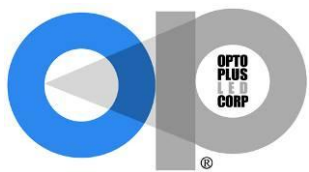

Opto Plus LED Corp.
0.56" SMD Type LED Display
OPS-S5620PG-GW
OPS-S5621PG-GW


● **PG: PURE GREEN (InGaN/GaN)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

| Parameter | Symbol | Maximum Rating | Unit |
|--------------------------------------|------------------|----------------|---------|
| Power dissipation | P _{AD} | 120 | mW |
| Derating liner from 25°C | - | 0.3 | mA / °C |
| Continuous forward current | I _{AF} | 30 | mA |
| Peak current (duty cycle 1/10, 1kHz) | I _{PF} | 100 | mA |
| Reverse voltage | V _R | 5 | V |
| Operating temperature | T _{OPR} | -40 to +105 | °C |
| Storage temperature | T _{STG} | -40 to +105 | °C |

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

| Characteristic | Symbol | Condition | Min. | Type. | Max. | Unit |
|------------------------------|----------------|----------------------|------|-------|------|------|
| Forward Voltage, (Per Dice) | V _F | I _F =20mA | - | 3.2 | 4.0 | V |
| Reverse Current, (Per Dice) | I _R | V _R =8V | - | - | 10 | μA |
| Dominant Wavelength | λ _D | I _F =20mA | 515 | - | 530 | nm |
| Luminous Intensity | I _v | I _F =20mA | 50 | 90 | 130 | mcd |
| Spectral radiation bandwidth | Δλ | I _F =20mA | - | 30 | - | nm |

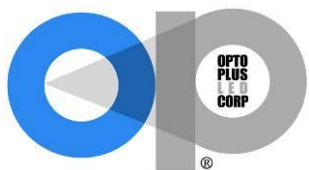

Opto Plus LED Corp.
0.56" SMD Type LED Display
OPS-S5620PG-GW
OPS-S5621PG-GW

● **PG: BIN GRADE (Unit : mcd / I_F =20mA)**


| PURE GREEN | O | P | Q |
|------------|-------------|--------------|---------------|
| | 50.0 – 75.0 | 75.1 – 100.0 | 100.1 – 130.0 |

● **PG: HUE GRADE (λ_D : nm)**

| 1 | 2 | 3 |
|---------------|---------------|---------------|
| 515.0 – 520.0 | 520.1 – 525.0 | 525.1 – 530.0 |

● **AVAILABLE BIN / HUE TABLE**

| | | |
|----|----|----|
| O1 | P1 | Q1 |
| O2 | P2 | Q2 |
| O3 | P3 | Q3 |

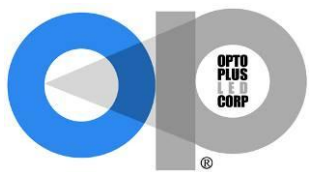

Opto Plus LED Corp.

0.56" SMD Type LED Display

OPS-S5620PG-GW

OPS-S5621PG-GW

● PG: PURE GREEN (InGaN/GaN) CURVE

Typical Electro-optical Characteristic Curves (25 °C Free Air Temperature Unless Otherwise Specified)

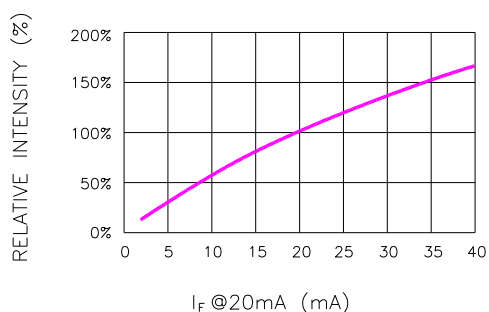


Fig.1 RELATIVE INTENSITY VS. FORWARD CURRENT

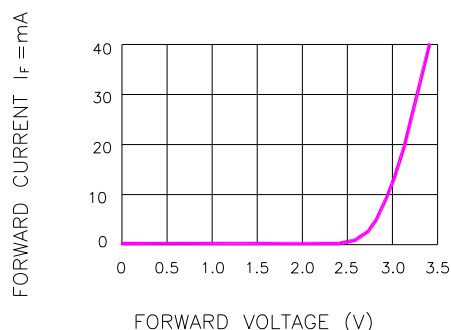


Fig.2 FORWARD CURRENT VS. FORWARD VOLTAGE

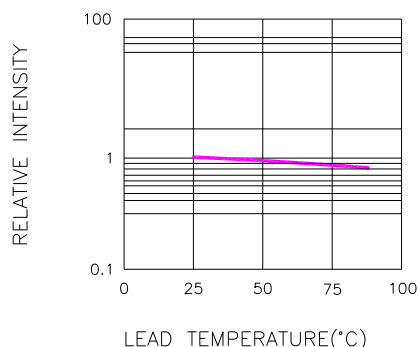


Fig.3 RELATIVE INTENSITY VS. LEAD TEMPERATURE
(PULSED 20 mA; 300us PULSE, 10ms PERIOD)

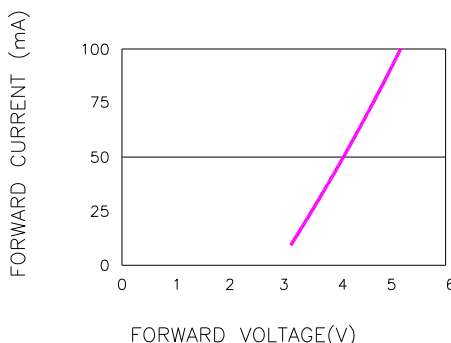


Fig.4 PEAK FORWARD VOLTAGE VS. FORWARD (100us TEST PULSE, 1% DUTY CYCLE)

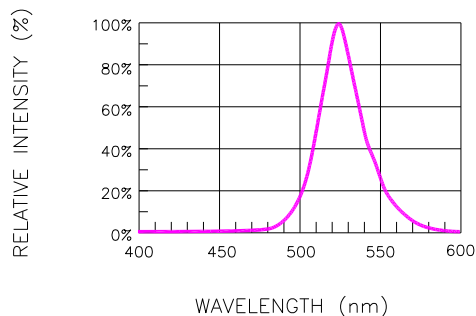


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH


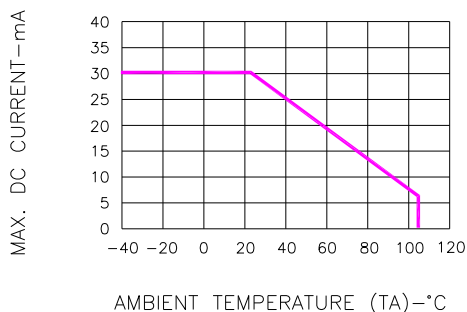


Fig.6 MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE

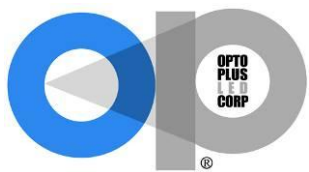

Opto Plus LED Corp.

0.56" SMD Type LED Display


OPS-S5620PG-GW

OPS-S5621PG-GW

● SMT REFLOW SOLDERING INSTRUCTIONS

SMT Soldering Profile

Pb free reflow soldering Profile

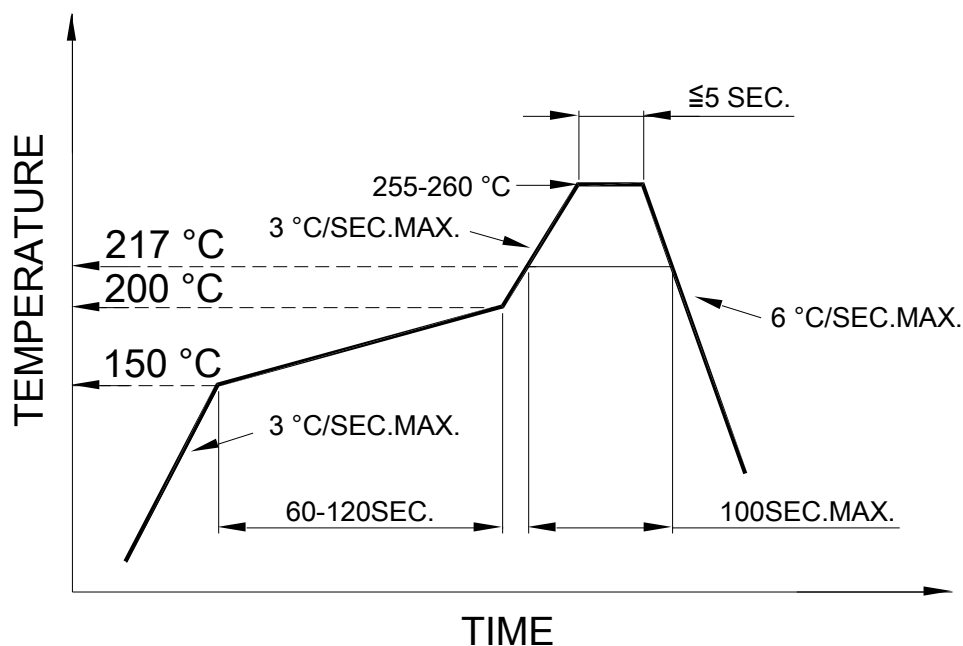


● SOLDERING IRON

Basic spec is ≤ 4 sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

● REWORK

- Customer must finish rework within 3 sec. under 350°C.
- The head of soldering iron cannot touch copper foil.

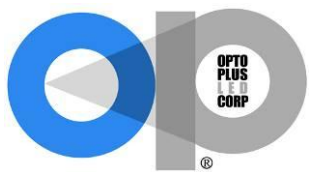


Opto Plus LED Corp.

0.56" SMD Type LED Display

OPS-S5620PG-GW

OPS-S5621PG-GW

● REEL DIMENSIONS

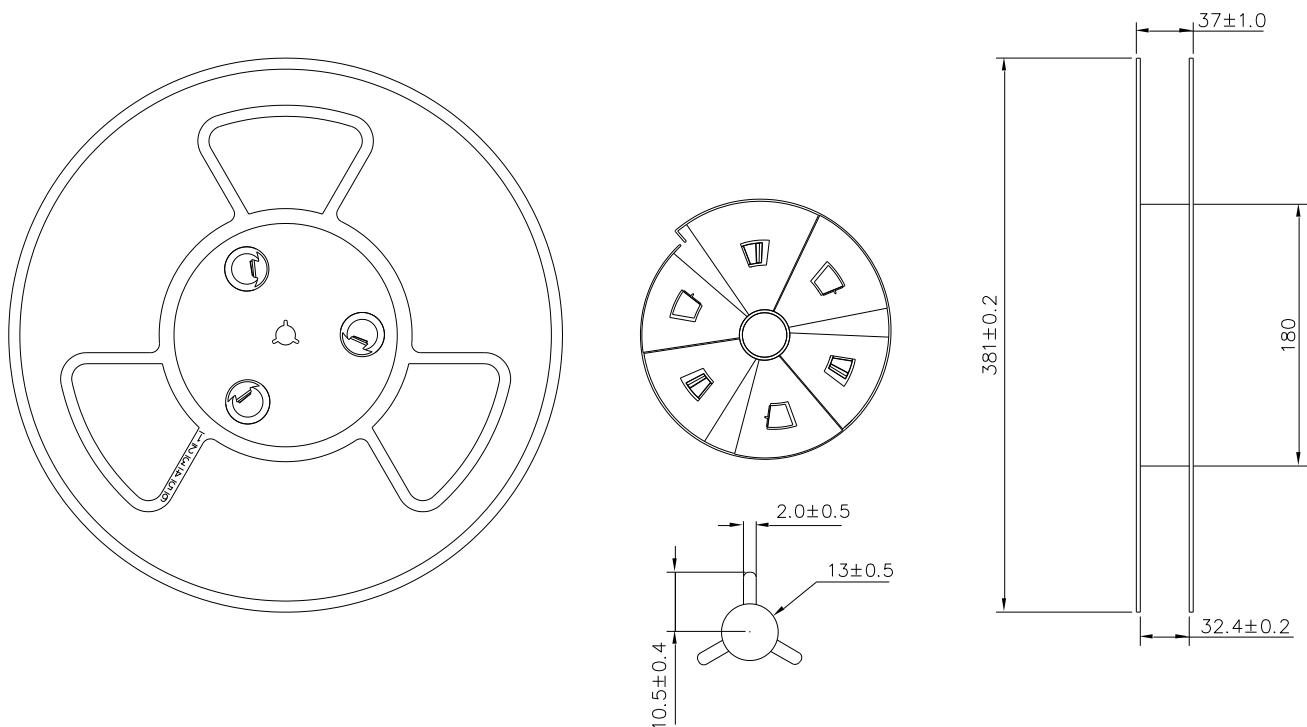

● PACKING & LABEL SPECIFICATIONS

