

20 SEGMENTS BAR GRAPH ARRAY

DC-20/20GWA

GREEN


Features


- •SUITABLE FOR LEVEL INDICATORS.
- •LOW CURRENT OPERATION.
- •EXCELLENT ON/OFF CONTRAST.
- •WIDE VIEWING ANGLE.
- •END STACKABLE.
- •MECHANICALLY RUGGED.
- •BI-COLOR VERSION AVAILABLE.
- •DIFFERENT COLORS IN ONE UNIT AVAILABLE.
- •STANDARD: GRAY FACE, WHITE SEGMENT.
- •RoHS COMPLIANT.

Description

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

Package Dimensions & Internal Circuit Diagram

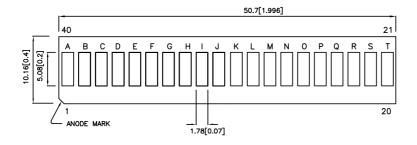

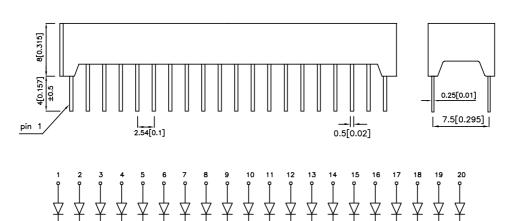

Notes:

1. All dimensions are in millimeters (inches), Tolerance is ±0.25(0.01")unless otherwise noted.

2. Specifications are subject to change without notice.

SPEC NO: DSAC1928 REV NO: V.4 DATE: MAR/21/2005 PAGE: 1 OF 3
APPROVED: J. Lu CHECKED: Joe Lee DRAWN: W.J.ZHU

Kingbright

Selection Guide

Part No.	Dice	Lens Type	lv (ucd) @ 10mA		Description
			Min.	Тур.	•
DC-20/20GWA	GREEN (GaP)	WHITE DIFFUSED	1900	9000	20 Segments Bar- graph-Display

Electrical / Optical Characteristics at Ta=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	565		nm	IF=20mA
λD	Dominant Wavelength	Green	568		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Green	30		nm	IF=20mA
С	Capacitance	Green	15		pF	VF=0V;f=1MHz
VF	Forward Voltage	Green	2.2	2.5	V	IF=20mA
lr	Reverse Current	Green		10	uA	VR = 5V

Absolute Maximum Ratings at Ta=25°C

Parameter	Green	Units		
Power dissipation	105	mW		
DC Forward Current	25	mA		
Peak Forward Current [1]	140	mA		
Reverse Voltage	5	V		
Operating/Storage Temperature	-40°C To +85°C			
Lead Solder Temperature [2]	260°C For 5 Seconds			


1. 1/10 Duty Cycle, 0.1ms Pulse Width.

2.5mm below package base.


SPEC NO: DSAC1928 **REV NO: V.4** DATE: MAR/21/2005 PAGE: 2 OF 3 DRAWN: W.J.ZHU


APPROVED: J. Lu **CHECKED:** Joe Lee


Kingbright

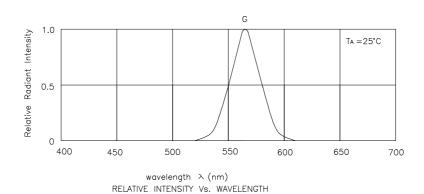


Green DC-20/20GWA









Remarks:

If special sorting is required (e.g. binning based on forward voltage,luminous intensity, or wavelength), the typical accuracy of the sorting process is as follows:

- 1. Wavelength: +/-1nm
- 2. Luminous Intensity: +/-15%
- 3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.

SPEC NO: DSAC1928 REV NO: V.4 DATE: MAR/21/2005 PAGE: 3 OF 3
APPROVED: J. Lu CHECKED: Joe Lee DRAWN: W.J.ZHU