


■ Features

- High Luminous PLCC6 Top SMD LEDs
- 5.0x5.0x1.5mm Standard Directivity
- Long lifetime Operation
- Superior Weather-resistance
- Yellow Diffused Type

■ Applications

- Backlighting (switches, keys, displays, illuminated advertising etc.)
- Substitution of Micro Incandescent Lamps
- Reading Lamps / Emergency Lighting
- Marker lights (e.g. steps, exit ways, etc.)
- Other Lighting

■ Outline Dimension

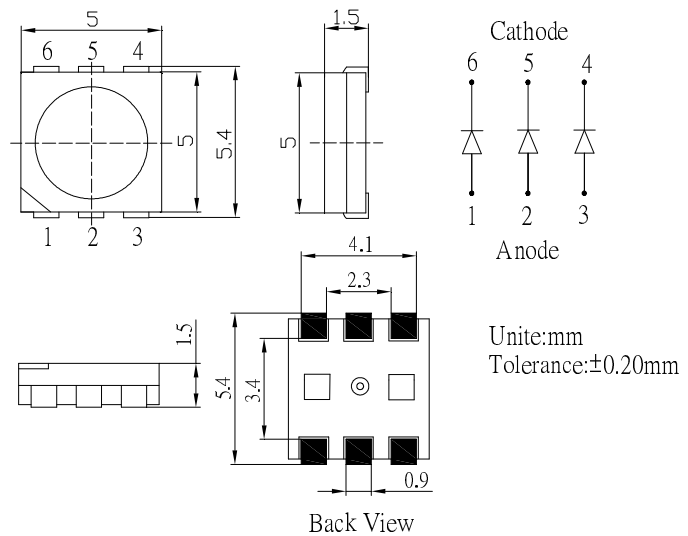


■ Absolute Maximum Rating

(Ta=25°C)

| Item | Symbol | Value | Unit |
|----------------------------|------------------|------------|------|
| DC Forward Current | I _F | 80 | mA |
| Pulse Forward Current* | I _{FP} | 120 | mA |
| Reverse Voltage | V _R | 5 | V |
| Power Dissipation | P _D | 288 | mW |
| Operating Temperature | T _{opr} | -30 ~ +85 | °C |
| Storage Temperature | T _{stg} | -40~ +100 | °C |
| Lead Soldering Temperature | T _{sol} | 260°C/5sec | - |

*Pulse width Max.10ms Duty ratio max 1/10

■ Directivity

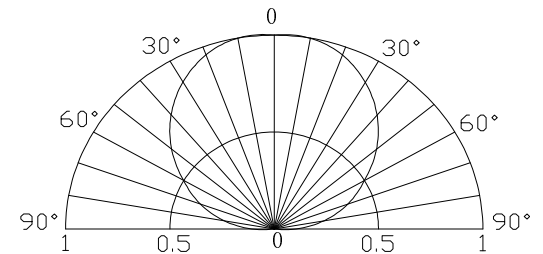

■ Electrical -Optical Characteristics

(Ta=25°C)

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit |
|--------------------------|-------------------|----------------------|------|------|------|------|
| DC Forward Voltage | V _F | I _F =60mA | 2.8 | 3.2 | 3.6 | V |
| DC Reverse Current | I _R | V _R =5V | - | - | 30 | μA |
| Luminous Flux | Φ _v | I _F =60mA | 20 | 22.5 | - | lm |
| Chromaticity Coordinate* | x | I _F =60mA | - | 0.34 | - | |
| | y | I _F =60mA | - | 0.37 | - | |
| 50% Power Angle | 2θ _{1/2} | I _F =60mA | - | 120 | - | deg |

*1 Luminous Intensity Measurement allowance is ±15%

*2 Chromaticity Coordinates Measurement allowance is ±10%