


■ Features

- High Luminous PLCC6 Top SMD LEDs
- 5.0x5.0x1.5mm Standard Directivity
- Long lifetime Operation
- Superior Weather-resistance
- Yellow Diffused Type

■ Applications

- Backlighting (switches, keys, displays, illuminated advertising etc.)
- Substitution of Micro Incandescent Lamps
- Reading Lamps / Emergency Lighting
- Marker lights (e.g. steps, exit ways, etc.)
- Other Lighting

■ Outline Dimension

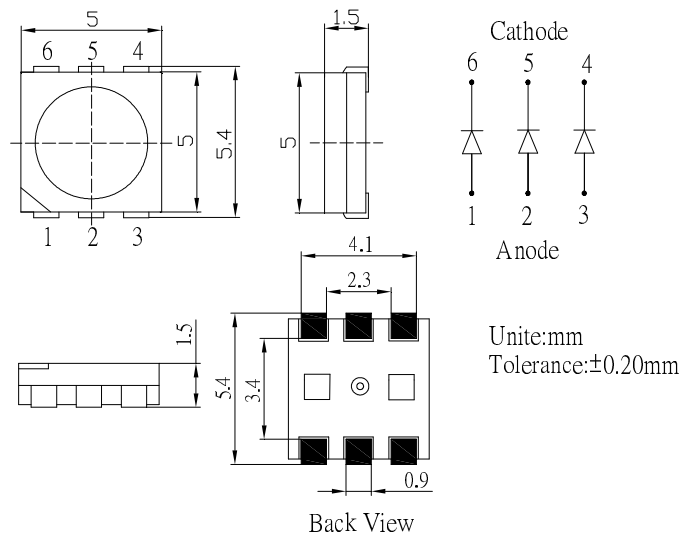


■ Absolute Maximum Rating

($T_a=25^{\circ}\text{C}$)

Item	Symbol	Value	Unit
DC Forward Current	I_F	80	mA
Pulse Forward Current*	I_{FP}	120	mA
Reverse Voltage	V_R	5	V
Power Dissipation	P_D	288	mW
Operating Temperature	T_{opr}	-30 ~ +85	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-40 ~ +100	$^{\circ}\text{C}$
Lead Soldering Temperature	T_{sol}	260 $^{\circ}\text{C}$ /5sec	-

*Pulse width Max.10ms Duty ratio max 1/10

■ Directivity

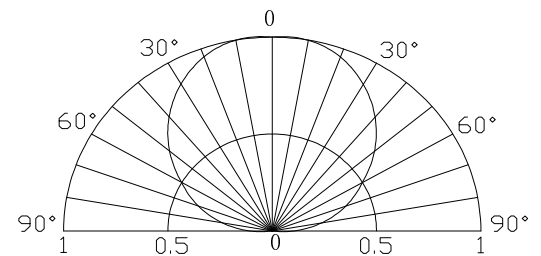

■ Electrical -Optical Characteristics

($T_a=25^{\circ}\text{C}$)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage	V_F	$I_F=60\text{mA}$	2.8	3.2	3.6	V
DC Reverse Current	I_R	$V_R=5\text{V}$	-	-	30	μA
Luminous Flux	Φ_v	$I_F=60\text{mA}$	12.5	14	-	lm
Chromaticity Coordinate*	x	$I_F=60\text{mA}$	-	0.44	-	
	y	$I_F=60\text{mA}$	-	0.30	-	
50% Power Angle	$2\theta_{1/2}$	$I_F=60\text{mA}$	-	120	-	deg

*1 Luminous Intensity Measurement allowance is $\pm 15\%$

*2 Chromaticity Coordinates Measurement allowance is $\pm 10\%$