


■Features

- Small double-end package
- 1.8mm Standard Directivity
- Good spectral matching to Si photodetector
- Water Clear Type

■Applications

- Optoelectronic switch
- Floppy disk drive
- Infrared emitting for miniature light barrier
- Smoke detector
- Others


■Outline Dimension

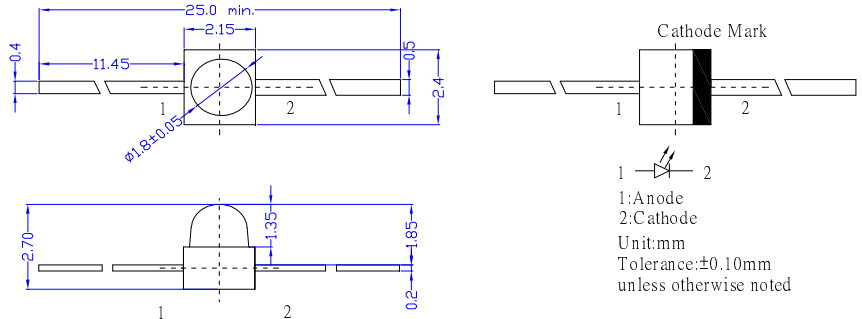

■Absolute Maximum Rating (Ta=25°C)

Item	Symbol	Value		Unit
		W/B/PG	YG/Y/R/O	
DC Forward Current	I _F	30	30	mA
Pulse Forward Current*	I _{FP}	100	100	mA
Reverse Voltage	V _R	5	5	V
Power Dissipation	P _D	108	78	mW
Operating Temperature	T _{opr}	-30 ~ +85		°C
Storage Temperature	T _{stg}	-40~ +100		°C
Lead Soldering Temperature	T _{sol}	260°C/5sec		-

■Directivity

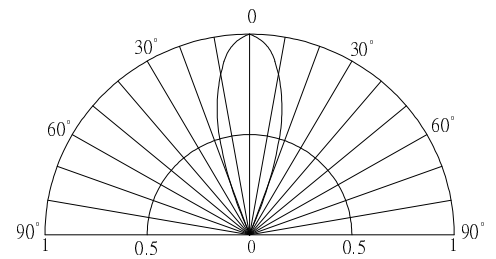

*Pulse width Max.10ms Duty ratio max 1/10

■Electrical -Optical Characteristics (Ta=25°C)

Part Number	Color		V _F (V)			I _R (μA)	I _v (mcd)*			λD(nm)*			2θ1/2(deg)
			Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
			I _F =20mA			V _R =5V	I _F =20mA						
OSB4212411C	Blue	B	2.8	3.1	3.6	10	1500	2500	-	455	460	465	10
OSG5212411C	Pure Green	PG	2.8	3.1	3.6	10	10000	12000	-	515	520	525	10
OSG8212411C	Yellow Green	YG	1.8	2.1	2.6	10	500	750	-	565	570	575	10
OSY5212411C	Yellow	Y	1.8	2.1	2.6	10	2000	3000	-	585	590	595	10
OSO5212411C	Orange	O	1.8	2.1	2.6	10	2000	3000	-	600	605	610	10
OSR5212411C	Red	R	1.8	2.1	2.6	10	3500	4500	-	620	625	630	10

*1 Tolerance of measurements of dominant wavelength is ±1nm

*2 Tolerance of measurements of luminous intensity is ±15%

*3 Tolerance of measurements of forward voltage is ±0.1V