


■Features

- Small double-end package
- 1.8mm Standard Directivity
- Good spectral matching to Si photodetector
- Water Clear Type

■Applications

- Optoelectronic switch
 - Floppy disk drive
 - Infrared emitting for miniature light barrier
 - Smoke detector
- Others

■Outline Dimension

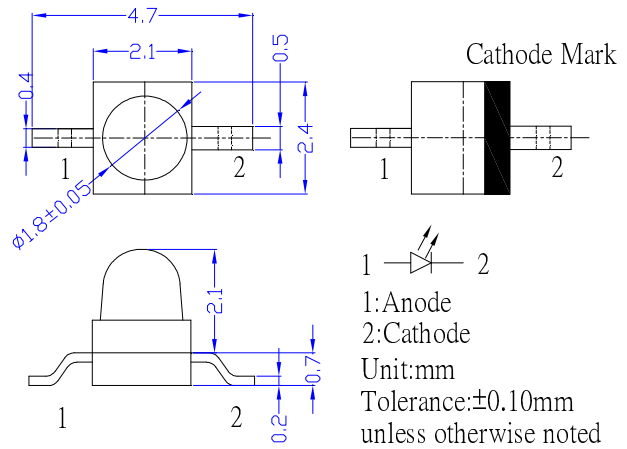


■Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value		Unit
		B/PG	YG/Y/R/O	
DC Forward Current	I _F	30	30	mA
Pulse Forward Current*	I _{FP}	100	100	mA
Reverse Voltage	V _R	5	5	V
Power Dissipation	P _D	78	108	mW
Operating Temperature	Topr	-30 ~ +85		°C
Storage Temperature	Tstg	-40~ +100		°C
Lead Soldering Temperature	Tsol	260°C/10sec		-

■Directivity

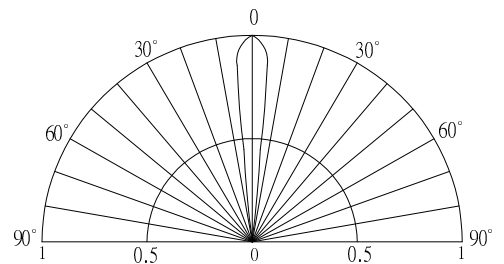

*Pulse width Max.10ms Duty ratio max 1/10

■Electrical -Optical Characteristics

(Ta=25°C)

Part Number	Color		V _F (V)			I _R (μA) Max.	I _v (mcd)*			λD(nm)*			2θ1/2(deg) Typ.
			Min.	Typ.	Max.		Min.	Typ.	Max.	Min.	Typ.	Max.	
			I _F =20mA			V _R =5V		I _F =20mA					
OSB4212411C-TR7	Blue	B	2.8	3.1	3.6	10	3000	4200	-	455	460	465	10
OSG5212411C-TR7	Pure Green	PG	2.8	3.1	3.6	10	10000	12000	-	520	525	530	10
OSG8212411C-TR7	Yellow Green	YG	1.8	2.1	2.6	10	750	1120	-	565	570	575	10
OSY5212411C-TR7	Yellow	Y	1.8	2.1	2.6	10	3000	4200	-	585	590	595	10
OSO5212411C-TR7	Orange	O	1.8	2.1	2.6	10	3000	4200	-	600	605	610	10
OSR5212411C-TR7	Red	R	1.8	2.1	2.6	10	3000	4200	-	620	625	630	10

*1 Tolerance of measurements of dominant wavelength is ± 1 nm

*2 Tolerance of measurements of luminous intensity is $\pm 15\%$

*3 Tolerance of measurements of forward voltage is ± 0.1 V