



PRODUCT DATA

Order code LM-VEG-W1 **LED Type** 2835 **Luminous efficacy** 110 lm/W Typical luminous flux, lm 49 lm Max. power per module 0.45 W Ingress protection **IP 67** Colometric data, CCT 7200 K

(upon request other options are available)

Module Size (L x W x H), mm 25 x 14 x 9 Maximum modules per chain 50 pcs.

Mounting 3M Double-sided adhesive tape

Operating temperature -20°C ~ +50°C

L80 lifetime > 60.000 hours (based on IES TM-21-11)

Warranty 5 years limited






APPLICATIONS

Typically used in small to medium size signage Can depth/returns: 40 - 120 mm

Shallow to medium depth light boxes and letters

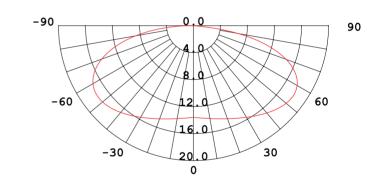

LOVD CHVS.

Standard Maximum power supply module quantity

20 W	44
35 W	76
60 W	132
100 W	220
150 W	260

SHIPPING INFORMATION

Inner box quantity Carton box quantity

Package gross weight Carton box dimensions 12.3 kgs

51.4 x 40.7 x 21.6 cm



This product is only suitable for connection to dedicated Class 1 or Class 2 power supplies rated DC12V (± 5%)

- This product is not to draw a total wattage of greater than the secondary (output) rating of the power supply
- Double-sided adhesive tape is for placement of the module only and additional fixation is needed
- This product is suitable for use in dry, damp and wet locations, but not suitable for submersed application
- Specifications of the products might change without further notice. Make sure to use the most recent