

(M) ISEI-3
ISSUE 6

ISEI-3
PAGE 1 OF 1

M

DRAWING
NUMBER

8

11

ISSUE

8

REPLACES

RELEASE NO.

CHECK

REVISIONS

A	CO 16449	D A W,	28, DEC 61
B	CO-34213	J A L	24 SEPT 74
C	CO 51463-D	WJM	16 JUL 82
D	CO-570414	CJH	21 MAR 85
E	CO94274	DLM	MAR 99

CHECK

27 FEB 82


CHECK

D A W 28, DEC '61

FORMTEK

CO-50378

DRAWN

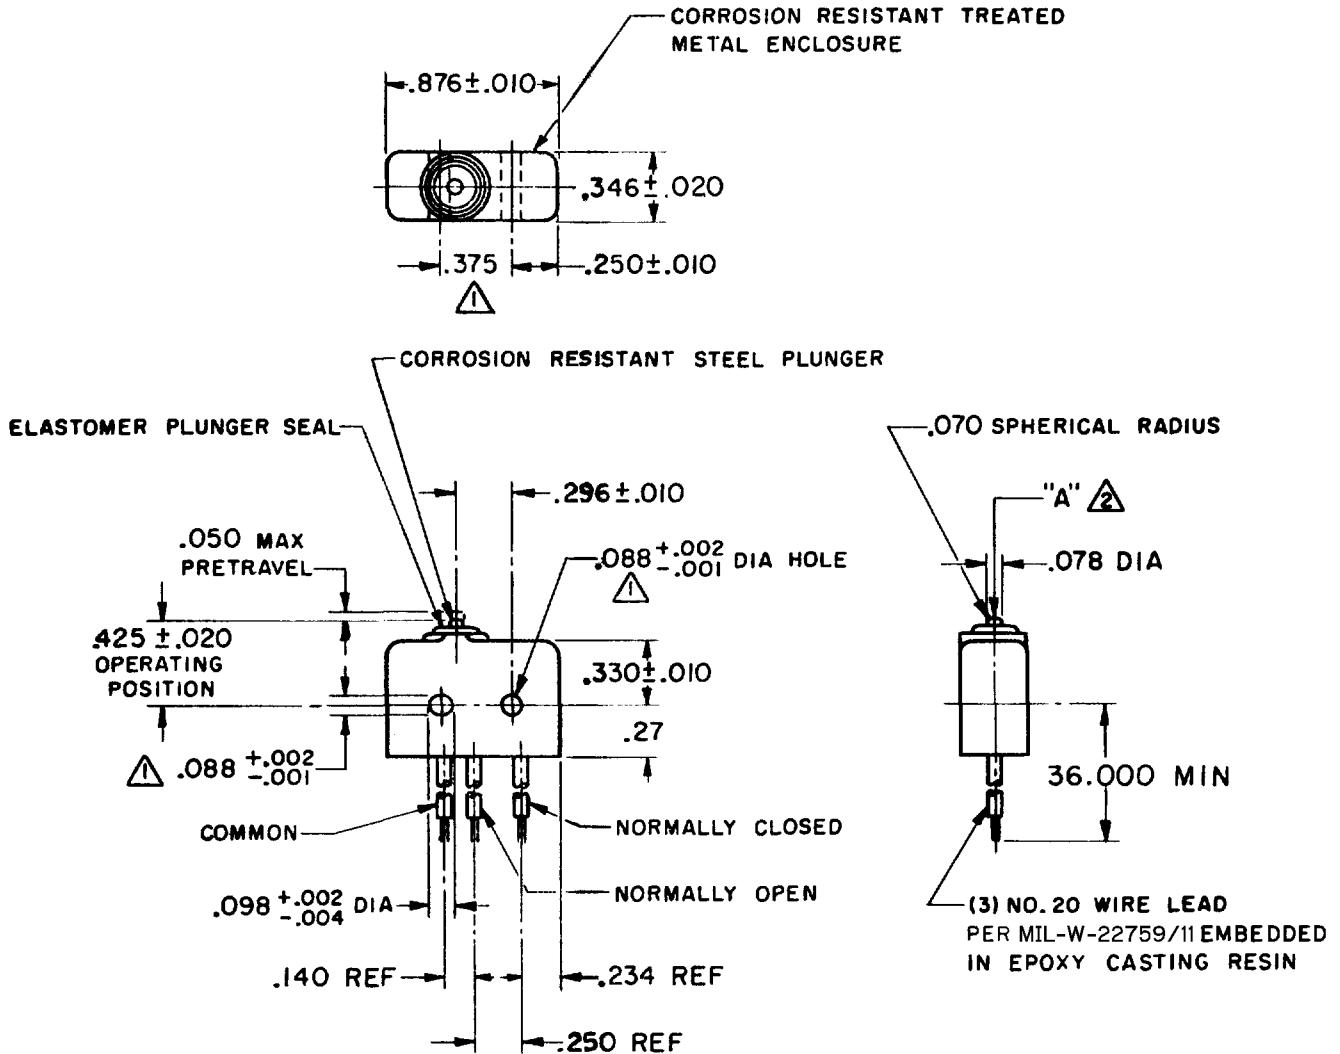

NOTE -

- ① - MOUNTING HOLES WILL ACCEPT .087 MAX DIA PINS OR SCREWS ON .375 ± .002 CENTERS
- ② - ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
- ③ - WEIGHT OF SWITCH ONLY IS .26 OZ MAX. WEIGHT OF SWITCH WITH WIRE LEADS IS 1.40 OZ MAX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 5-17 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE ----- 4 OZ MIN	250 VAC ----- 5 AMP	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
RELEASE TRAVEL ----- .004 MIN	30 VOLTS DC RATING	
DIFFERENTIAL TRAVEL ----- .004 MAX	INDUCTIVE ----- SEA LEVEL ----- 3 AMP	
OVERTRAVEL ----- .003 MIN	50,000 FT ----- 2.5 AMP	
	RESISTIVE ----- SEA LEVEL ----- 5 AMP	
	50,000 FT ----- 5 AMP	
	MAXIMUM INRUSH ----- 24 AMP	WEIGHT ③