

Drg No :- **C 44057**

INSTALLATION DRAWING

| ISSUE | REVISION | DATE |
|-------|-------------|----------|
| 1 | FIRST ISSUE | 10/7/00 |
| 2 | E2394-A1 | 16/07/08 |

SPECIFICATION

ACTUATING FORCE = 0.7N [2.5ozf] MAX

RELEASE FORCE = 0.09N [0.32ozf] MIN

FREE POSITION = 12.5 [0.49] MAX


OPERATING POSITION = 10.3 ^{+0.8} _{-0.55} [0.4]

MOVEMENT DIFFERENTIAL = 0.45 [0.018] MAX

OVER TRAVEL = DEPRESS TO CASE (AVAILABLE)


TESTED AND STAMPED TO UL & CSA REQUIREMENTS

APPROVAL RATING :-
5AMP - 250 V.A.C.

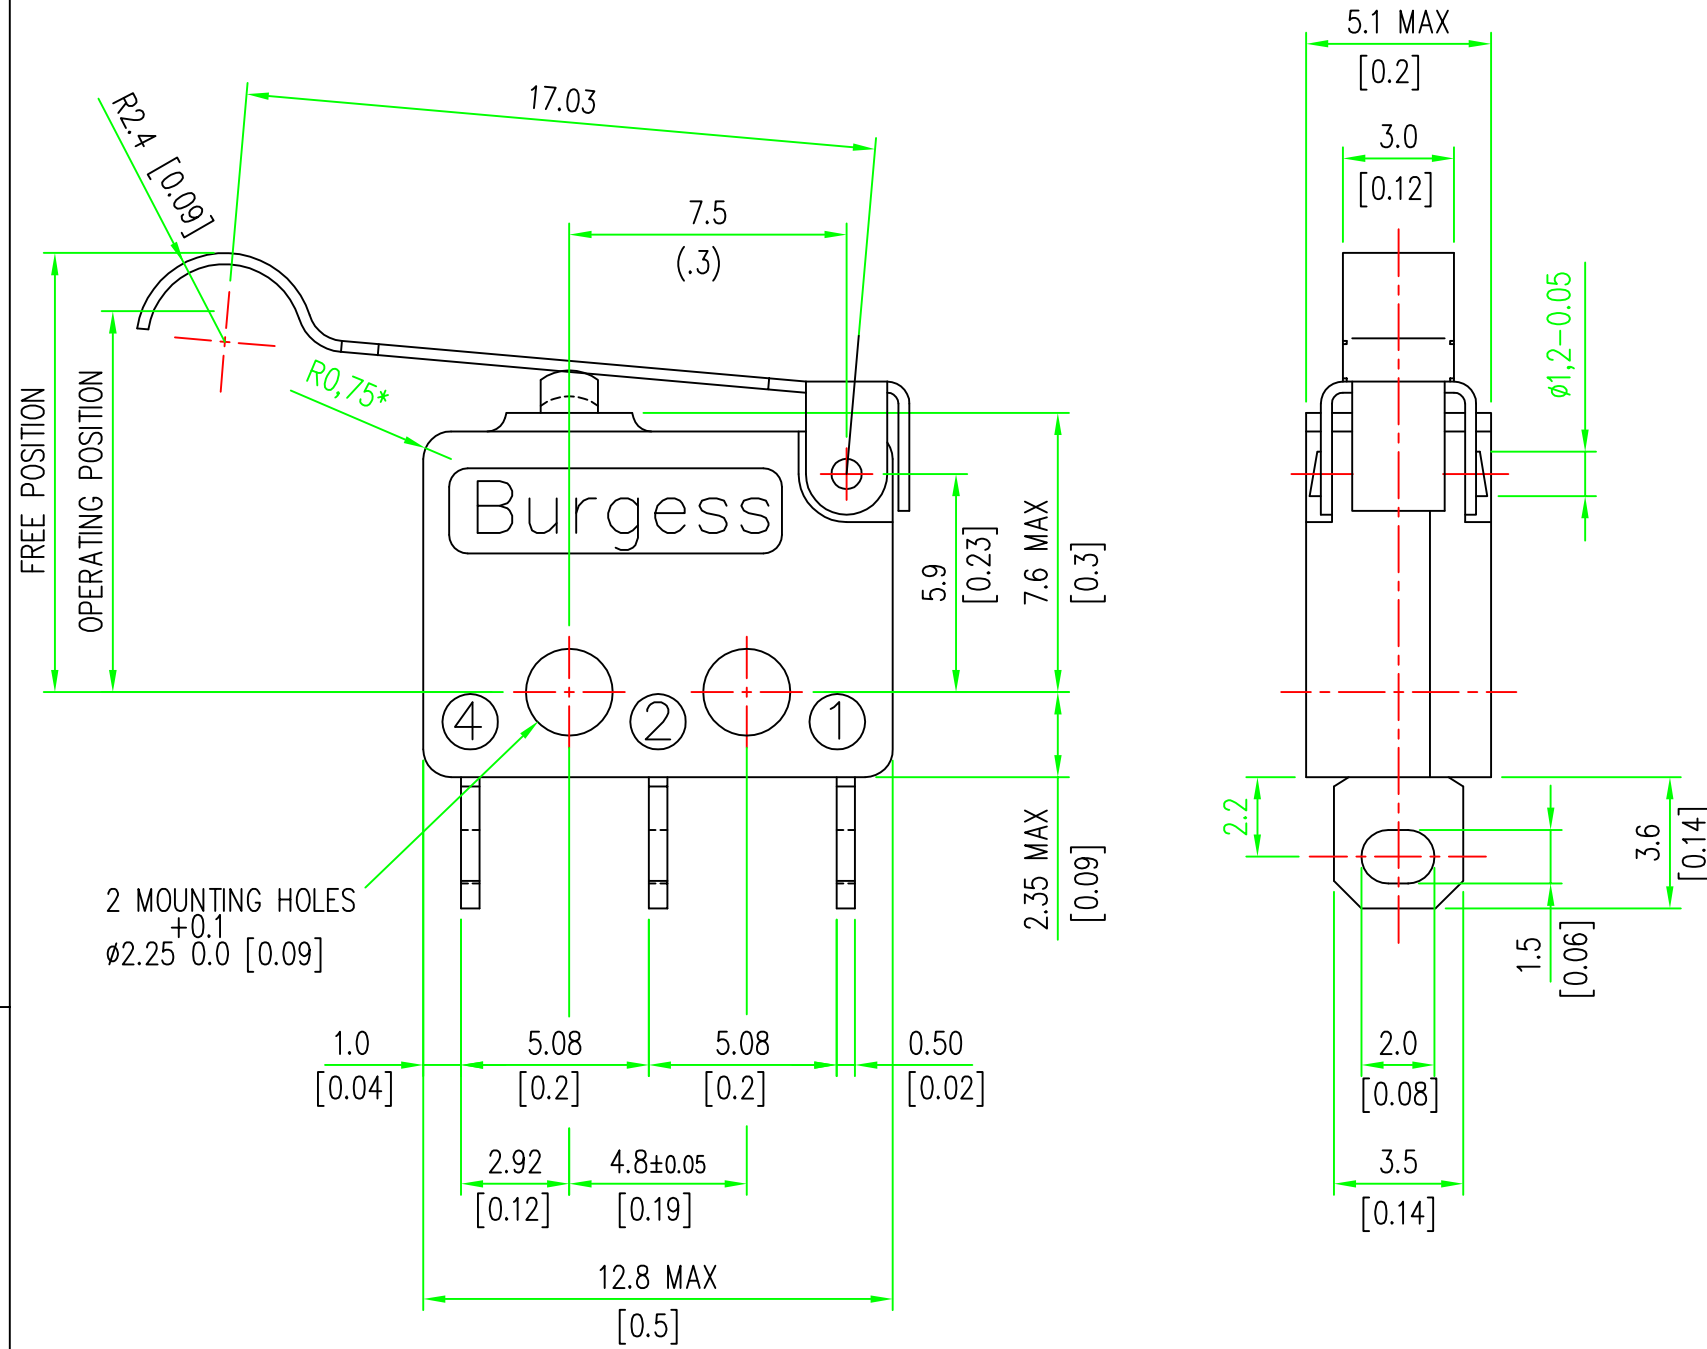

*Valid for all case corners.

DIAGRAM OF CONNECTIONS

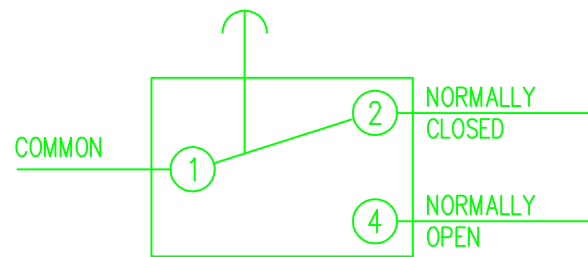

1

2

3

4

5

6

7

8

9

SAIA-Burgess Electronics

SWITCHES • MOTORS • CONTROLLERS

SAIA-Burgess Electronics Limited
Dukesway, Team Valley Trading Estate
Gateshead, Tyne & Wear NE11 0UB
Tel: (0191)4016100, Fax: (0191)4016322



THIRD ANGLE PROJECTION

DO NOT SCALE !
This drawing must only be amended on CAD system

TOLERANCES UNLESS STATED:-
NO DECIMAL PLACE ± 0.50 1 DECIMAL PLACES ± 0.25
2 DECIMAL PLACES ± 0.15 ANGULAR $\pm 1^\circ$
INCH - OUNCE UNITS (IN BRACKETS)

ALL DIMENSIONS SPECIFIED IN MILLIMETRES

| | | | |
|-------------|---------|-------------------|--|
| DRAWN | T.BELL. | Approved | |
| DATE | 10/7/00 | DRAWING OFFICE | |
| SCALE | 5:1 | ENGINEERING | |
| DATE ISSUED | | QUALITY ASSURANCE | |

| | |
|--------------------------|-----------|
| TITLE / DESCRIPTION | |
| F4T7YC UL | |
| Drg No :- C 44057 | A3 |