
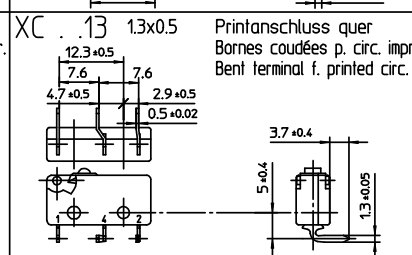


Schaltschema / Schema de commutation / Circuitry			Definition der zusätzlichen Typenvarianten Désignations complémentaires pour exécutions spéciales Addition ordering information for special contact material	Zusatzbezeichnung Désignation suppl. Add. ordering spec.	Typenbeispiel Exemple de type Type example
<p>Umschalter / Inverseur Change over</p> <p>CO</p>	<p>Öffner / Rupteur Normally closed</p> <p>NC</p>	<p>Schliesser / Contacteur Normally open</p> <p>NO</p>	<p>Gold-Mikroprofil-Kontakte / Contacts micro-profil en or / Gold-cross bar contacts</p> <p>Vollgold-Kontakte / Contacts en or massif / gold alloy contacts AuAg 26 Ni 3</p> <p>Temp.-beständig max. 125°C / Temp.d'emploi adm. max. 125°C / Ambient temp. max. 125°C</p> <p>Temp.-beständig max. 140°C / Temp.d'emploi adm. max. 140°C / Ambient temp. max. 140°C</p>	<p>-81</p> <p>-84</p> <p>V</p> <p>W</p>	<p>XCC3-81</p> <p>XCC3-84Z55</p> <p>XCC3V</p> <p>XCC3W</p>

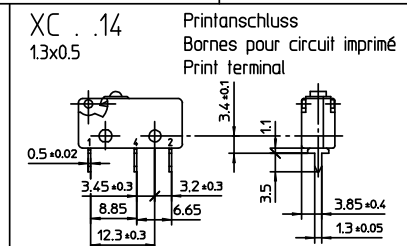

Angef.	26.09.86	Std.	Massstab 1 : 1 (2 : 1)	Typenblatt für Mikroschalter Caractéristiques pour Microrupteurs Micro switch data sheet					
Geprüft				Verantw.St.	Typ: XC . . .				
NB									
Mitt.Nr.									
Ersatz für									
Saia-Burgess Industry AG				C4	776	2600	0 ae	D	F E