


PUSHBUTTON SWITCHES

PRODUCT NUMBER 5000.0104



TECHNICAL DATA


Product number	5000.0104
Actuator color / printing	
Product family	Pushbutton switches
Actuation type	direct
Diameter	16 + 0.05
Weight	5.000 g
ROHS conform	yes
Switching function	Normally open contact (SPNO)
Material fixed contact	Cu silver-plated
Number of poles	1 - pole
connections	Quick-connect terminal, 2.8 x 0.8
Mechanical life endurance	20E4
Rating IEC	4 (2) A 250 V AC 5E4
Rating North America	2 A 250 V AC 1/10 HP 4 A 125 V AC 1/10 HP
Proof tracking	250 PTI
Insulation spacing	acc. to EN 61058 for reinforced or double insulation
Protection type	→ Connection IP 40

	→ Actuator	IP 40
Ambient temperature	-20 °C ... +85 °C	
Ambient temperature	-20 °C ... +55 °C	
Storage temperature	-40 °C ... +80 °C	
Flammability	UL 94 V-2	
Glow wire test temperature	850 °C	
Actuators and additional actuators	actuator: PA glass fiber-reinforced, black	
Housing description	housing: PA glass fiber-reinforced, black	
Connection surface	→ bearing connection	silver plated
	→ external connection	silver plated
Contact material	Ag	
Contact distance	≥ 3 mm	
Rating Code UL	R 3	
Contact type	lifting contact	
Plug force of the terminals	≤ 64 N	
Pretravel max.	2.0 ±0.4 mm	
Total travel / stroke	4.0 mm	
Approval marks	CSA / UL / ENEC 05	
Suitable for appliances of protection class	II	
Additional labeling	site, year, week of manuf. acc. to DIN EN 60062	
Type of fastening	Snap fastening	
Degree of pollution	3	
Stock version	●	

PRODUCT IMAGE



DRAWINGS

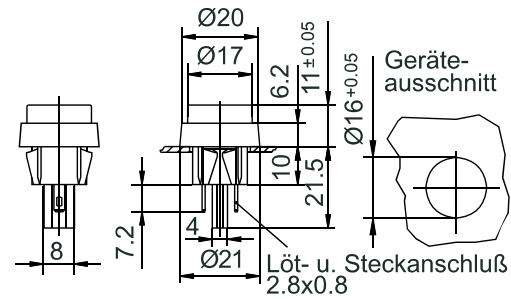

X \varnothing
 1.4 ... 1-7 | 16.0 +0.05
 X = wall thickness

Technical changes reserved. Dimensions are not binding.
 Detailed specifications available on request.

Marquardt GmbH · Schloss-Straße 16 · 78604 Rietheim-Weilheim · Germany
 Phone: +49 (0) 7424 / 99-0 · Fax: +49 (0) 7424 / 99-2399 · www.marquardt.com · marquardt@marquardt.de