



## ·嘉尼企業股份有限公司CANAL ELECTRONIC CO.,LTD. -





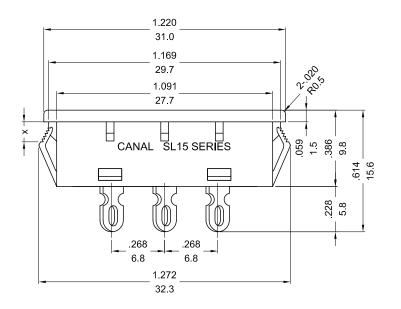





## SLIDE SWITCH MODEL SL15 SERIES

RATING:12(4)A 125/250V~μ (cURus/ENEC15) 10(1)A 250V~ uT85 1E3 (CQC) CIRCUIT:SINGLE-POLE DOUBLE THROW

DIELECTRIC STRENGTH:1500VAC FOR 1 MINUTE INSULATION RESISTANCE:DC 500V-100M $\Omega$  (MIN) CONTACT RESISTANCE : 20m $\Omega$  INITIAL (MAX)





## NOTE:TOLERANCES UNLESS OTHERWISE SPECIFIED:± .012/0.3 (in/mm)

REVISION	DESCRIPTION	REVISED BY	TOLERAN	CES	ΑN	ANGLE ½ 🕁 😅		UNIT mm	PART		DWG NO
<u>4</u>			DRAWN BY	向宏	DESIGNED BY	聶明	SCALE	2/1	NAME	SL15 SPEC DRAWING	
<u>/3</u> 2014.02.05	修正料號,重新出圖	向 宏						2/1			CEOFFC
<u>/2</u> 2013.04.27	修正圖號,重新出圖	向 宏	CHECKED		APPROVED		DATE	2012 04 12	DADT NO		S5255C
<u>1</u> 2013.04.12	首次出圖	向 宏	BY		BY		DATE	2013.04.12	PART NO	△ 3L13-121A3B3-F3A-13CN	