


07 Series

Snap-Acting Pushbutton Switches

HOW TO ORDER SEE PAGE 1

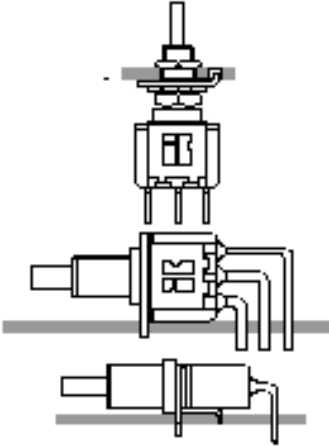

SPECIFICATIONS:

- Contact rating: see page 1 or 45
- Electrical life: 50,000 make and break cycles at full load
- Contact resistance: 10mΩ max. initial @ 2-4VDC 100mA for both coin silver and gold plated contacts
- Insulation resistance: 1.000MΩ min.
- Dielectric strengths: 1.500V RMS @ sea level
- Operation temperature: -30 °C to 85 °C
- Cap installation force: 45N max. permissible



MATERIALS:

- Plunger: glass filled nylon or polyester (UL 94V-0)
- Bushing: brass, nickel plated
- Housing: stainless steel
- Case: diallyl phthalate (DAP) (UL 94V-0)
- Terminal seal: epoxy
- Cap and frame: nylon (UL 94V-0)
- Mounting bracket: stainless steel
- Switch support: brass, tin plated
- Contact materials: see page 1 or 45

SPDT TYPE 1507P1B10M1RE



FUNCTION	SWITCH POSITION	
	ON	MOB
TERM. CONN.	1-3	1-2

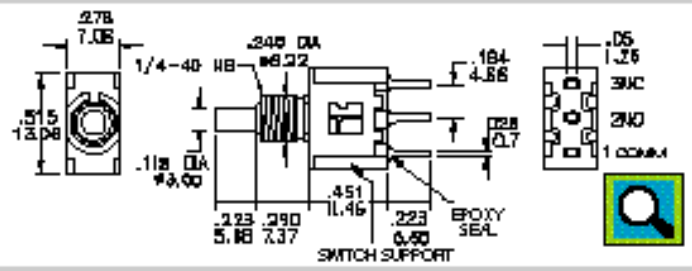



DPDT TYPE 2507P1B10M1RE



FUNCTION	SWITCH POSITION	
	ON	MOB
TERM. CONN.	1-3, 4-6	1-2, 4-5

NOTE FOR DPDT TYPE:
POLES MAY NOT CRANSE OVER #MULTIPOLE ONLY


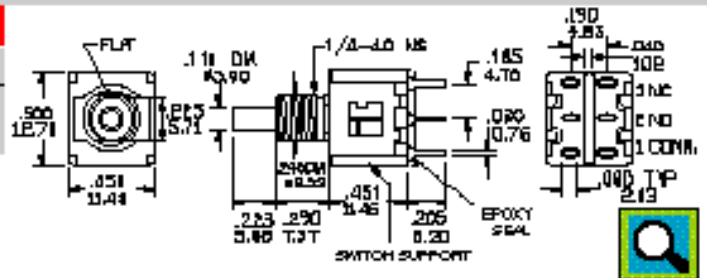



SPDT TYPE 1507P1B20M6QE


TERMINATIONS OPTIONS



M0

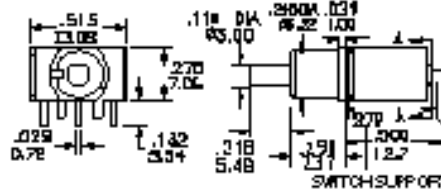

DPDT TYPE 2507P1B20M6RE



M0

