

圖號 DRAWING No. :

校訂版次 REVISIONS

品名 NAME: Ring

ITEM No. :


版次	記述 DESCRIPTION	DATE	核可
1	產品尺寸更改	106/08/25	ANDY

MAXIMUM ELECTRIC CURRENT

A. W. G	16	14
MAX AMP	18	30

NOTE:

1. MAXIMUM ELECTRICAL RATING: 600 VOLTS
2. SHRINK TEMP: 150°C
OPERATING TEMP: -10°C ~ 105°C
3. BRAZED SEAM
4. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm²
INSULATED COLOR: BLUE
5. MATERIAL THICKNESS: t
TOLERANCE: ±0.05

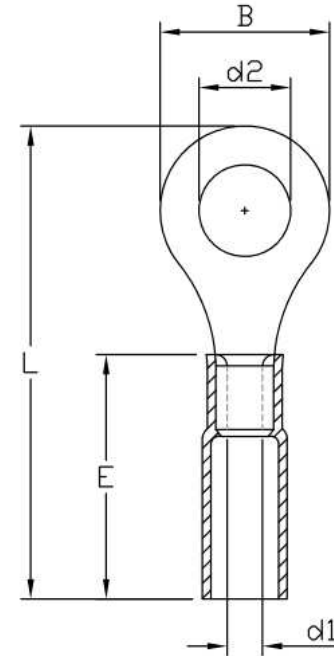

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	d2 ±0.20	B ±0.20	L ±2.00	E ±2.00	d1 ±0.20	t
16-14 AWG 1.5-2.5 mm ²		3.7	8.5	30.0	20.5	2.3	0.8
	ST-081/B-T	4.3	8.5	30.0			
		5.3	8.5	30.0			
		6.5	12.0	33.5			
		8.4	12.0	33.5			
		10.5	13.6	37.2			

認可 APPROVALS

第三視角
THIRD VIEW

MATERIAL

單位 UNIT

製圖 DRAFT: TINA

INSULATION: HEAT-SHRINK TUBE

m/m

設計 DESIGN: KEN

MATERIAL: COPPER

比例 SCALE

核可 CHECKED: ANDY

TIN PLATING

日期 DATE: 2015.01.05

