A range of panel mounting audio and video connectors incorporating many innovative

features, compatible with all leading manufactures' cable sockets

- -Has an internal cut out which ensures a positive and secure socket retention feature.
- -Generous solder buckets enable easier cable assembly as well as catering for larger

conductive sizes.

-Available in satin nickel or matt black finish, with either silver or gold plated contacts.

Features

Mechanical Properties

Zinc high pressure diecast Housing Satin nickel or black chrome

Contact Base Valox DR48

Brass, 3 microns silver, anti-tarnish Contacts

Finish, or 0.5 microns gold Polypropylene VIR 222, black

RoHS

2002/95/EC

Compliant

Spring Steel, 3 mircons silver

Electrical

Collar

Screen

Rated Voltage 50 V a.c. Test Voltage 1000 V r.m.s. Insulation Resistance 103 MΩ After damp heat 500 MΩ Contact Resistance 10 m Ω max Current Rating at 40 deg C 3 pin - 15 amp 4 pin - 10 5 pin - 7.5 amp

Current Rating at 70 deg C 3 pin - 7.5 amp

4 pin - 5 5 pin - 3 amp

Terminal wire sizes 3 pin 2.5 mm / 14 AWG

4 pin 1.5 mm / 16 AWG 5 pin 1.0 mm / 18 AWG


Climatic

Climatic category 25/070/04

Temperature Range -25°C to +70°C

Damp heat, steady state 4 days

Dimensions

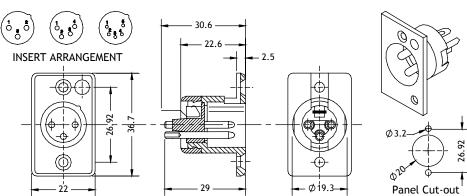

Deltron Part No	Silver Contacts		Gold Contacts	
	Nickel	Black	Nickel	Black
3-way	703-0300	711-0300	707-0300	713-0300
4-way	703-0400	711-0400	707-0400	715-0500
5way	703-0500	711-0500	707-0500	715-0500



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY O ALPHA 3 MANUFACTURING.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILL LINEAR TOLERANCE: NO DECIMAL PLACES +0 1 DECIMAL PLACE ±0.25

2 DECIMAL PLACES ±0.1

ANGULAR TOLERANCE:

NISH		OFESSIONAL QUALITY 000 SERIES		DEBURR AND BREA SHARP EDGES
	IF	IN DOUBT ASK		
	DO NO	OT SCALE DRAW	ING	
ATER	RIAL		N/A	

DRAWN BY	SPB	TIT
APPROVED BY	WC	
THIRD ANGLE PROJECTION	SHEET 1 OF 1	
	SCALE 1:1	DR
$\varphi \cup$	A4	

GENERAL SPECIFICATION MULTIPOLE CONNECTOR PANEL PLUG 80

703-711-707-715

Release