

## Specification




Front shell	Steel, tin plated
Housing	Black thermoplastic
Flammability	UL 94V-0
Contact area plating	0.80µm Au

All materials are RoHS compliant



## Connector Range

Type	No of Ways	3mm Hole	4-40 Threaded Inserts	4-40 Female Screwlocks	M3 Threaded Inserts	M3 Female Screwlocks
Plug	9	0-1740195-2	1-1740195-2	3-1740195-2	2-1740195-2	4-1740195-2
	15	0-1740197-2	1-1740197-2	3-1740197-2	2-1740197-2	4-1740197-2
	25	0-1740199-2	1-1740199-2	3-1740199-2	2-1740199-2	4-1740199-2
	37	0-1740201-2	1-1740201-2	3-1740201-2	2-1740201-2	4-1740201-2
Socket	9	0-1740194-2	1-1740194-2	3-1740194-2	2-1740194-2	4-1740194-2
	15	0-1740196-2	1-1740196-2	3-1740196-2	2-1740196-2	4-1740196-2
	25	0-1740198-2	1-1740198-2	3-1740198-2	2-1740198-2	4-1740198-2
	37	0-1740200-2	1-1740200-2	3-1740200-2	2-1740200-2	4-1740200-2

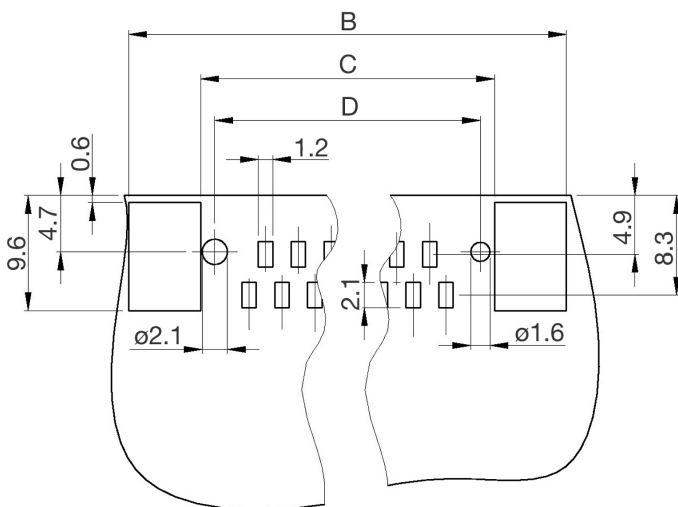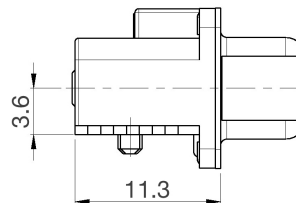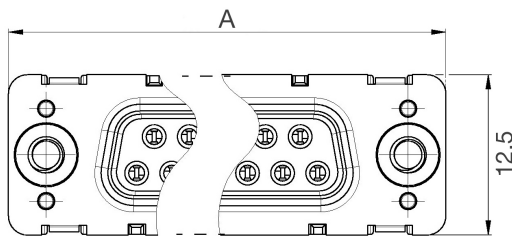

No of Ways	Dim A	Dim B	Dim C	Dim D
9	30.80	31.00	20.10	16.60
15	39.20	39.30	28.40	24.90
25	53.05	53.05	42.15	38.65
37	69.40	69.50	58.60	55.10

All dimensions in mm