

D-SUB contact insert - VS-15-BU-DSUB/16-MPT-0,5 - 1688094


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



D-SUB contact insert, shell size 2, with 15 signal contacts, female type of contact, screw connection, straight, for panel mounting frame and sleeve housing with IP67 protection



Key Commercial Data

| | |
|--------------------------------------|--|
| Packing unit | 10 pc |
| GTIN |  4 017918 179571 |
| Weight per Piece (excluding packing) | 18.8 g |
| Custom tariff number | 85366990 |
| Country of origin | Germany |

Technical data

General data

| | |
|----------------------|-----|
| Number of positions | 15 |
| Overvoltage category | III |
| Degree of pollution | 2 |

Standards and Regulations

| | |
|--|----|
| Flammability rating according to UL 94 | V0 |
|--|----|

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27140816 |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260705 |
| eCl@ss 7.0 | 27440309 |
| eCl@ss 8.0 | 27440302 |

D-SUB contact insert - VS-15-BU-DSUB/16-MPT-0,5 - 1688094

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 9.0 | 27440205 |
|------------|----------|

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000438 |
| ETIM 3.0 | EC000438 |
| ETIM 4.0 | EC000438 |
| ETIM 5.0 | EC001132 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211923 |
| UNSPSC 7.0901 | 39121522 |
| UNSPSC 11 | 39121522 |
| UNSPSC 12.01 | 39121522 |
| UNSPSC 13.2 | 39121522 |

Approvals

Approvals

Approvals

EAC / EAC

Ex Approvals

Approvals submitted

Approval details


| |
|-----|
| EAC |
|-----|

| |
|-----|
| EAC |
|-----|


Drawings

D-SUB contact insert - VS-15-BU-DSUB/16-MPT-0,5 - 1688094

Dimensional drawing

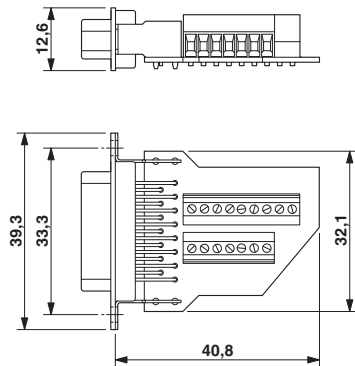

Schematic diagram



D-SUB contact insert