



ELECTRICAL CHARACTERISTICS

TEST NOTES:

1. TURNS RATIO:
100KHz/100mV 1CT:1CT ±3%
2. OCL @ 100kHz/100mV 8mA DC BIAS 350uH MIN.
3. INSERTION LOSS:
-1.0dB MAXIMUM AT 1MHz TO 100MHz
4. RETURN LOSS:
-16dB MINIMUM AT 1MHz TO 30MHz
-13.5dB MINIMUM AT 30MHz TO 60MHz
-12dB MINIMUM AT 60MHz TO 80MHz
-10dB MINIMUM AT 80MHz TO 100MHz
5. CROSS TALK:
-30dB MINIMUM AT 1MHz TO 100MHz
6. COMMON MODE REJECTION
-30dB MINIMUM AT 1MHz TO 100MHz

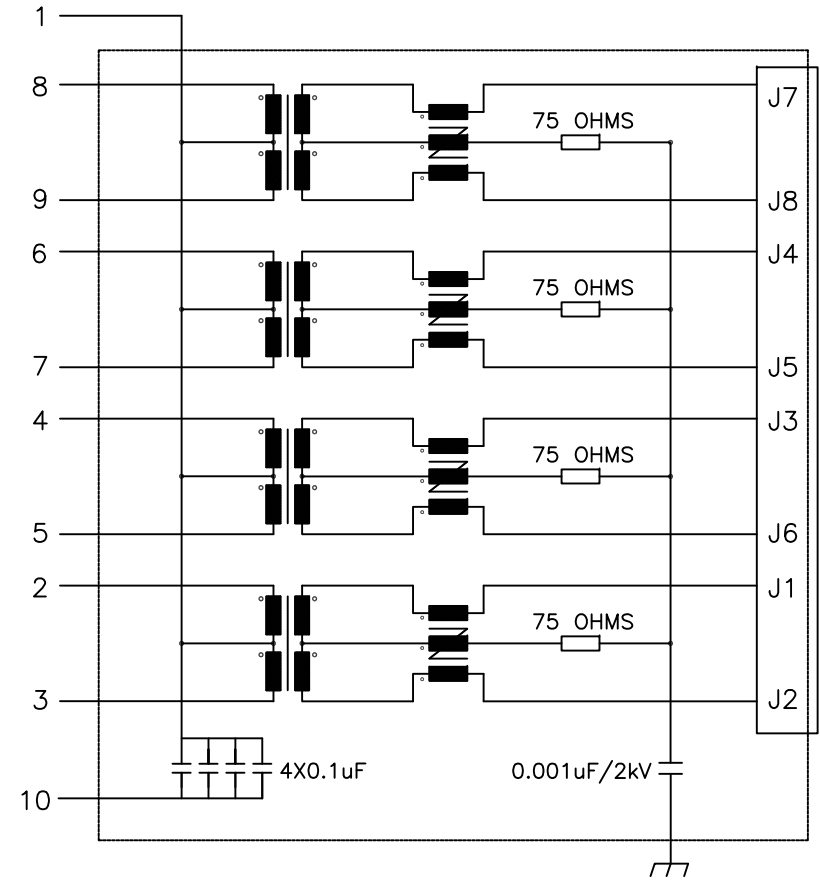

CONNECTOR SCHEMATIC

						UNLESS OTHERWISE SPECIFIED TOLERANCE			 www.attend.com.tw	
						ANGLES	ANG.	±5°		
						LINEAR	0.	±0.3		
							0.00	±0.20		
						SCALE	AS SHOWN	UNIT: mm	DRAWN NAME: Dual USB3.0 with RJ45 Socket Giga Transformer Type	
A						DRAWN	Willis	2013/08/05	PRODUCT NO. 209G-CCN0	
A						CHECKED	Angel	2013/08/05	FILE NAME 209G-CCN0_B_1	
A						APPROVED	Ken	2013/08/05		
REV.	DESCRIPTION		DATE	REV.	DESCRIPTION		DATE	SIZE A4	REV. 1.0	
1				4						