
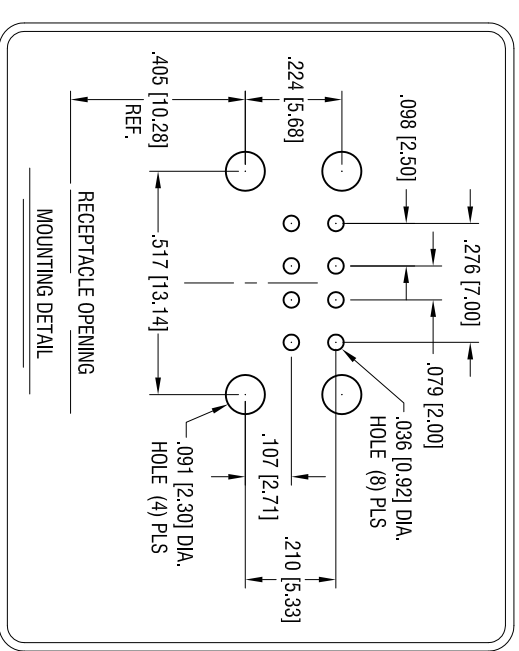
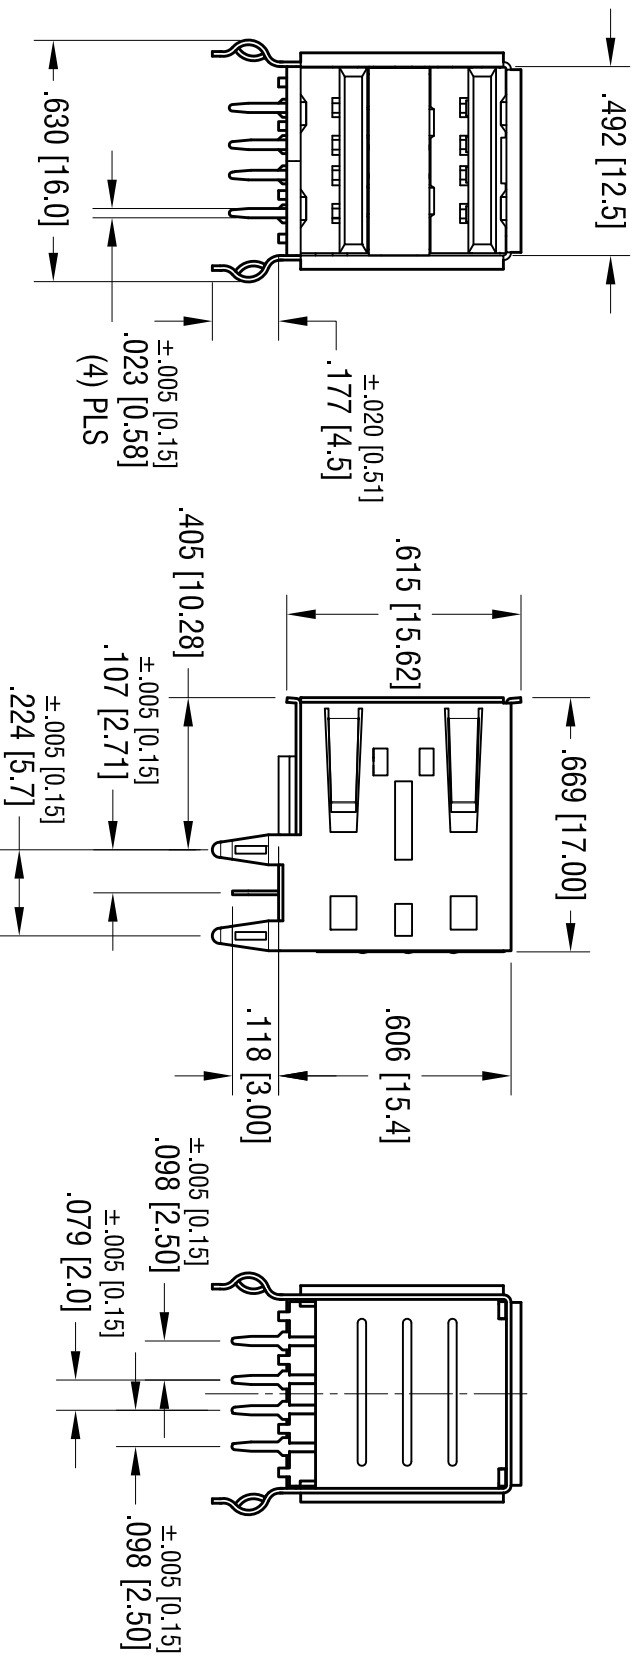



DATE	DESCRIPTION	REV.
8.13.99	CHANGE AS PER ECN 99-057	A
8.08.05	CHANGE AS PER ECN 05-032	B
7.16.08	CHANGE AS PER ECN08-129	C
12.16.09	CHANGE AS PER ECN 09-188	D
12.28.15	CHANGE AS PER ECN 15-149	E

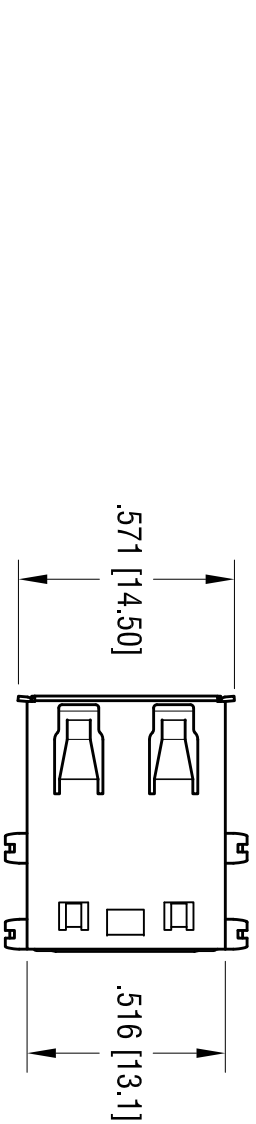

**Notes:**

Shell: Mat'l: Steel,  
 Finish: Nickel plate, over Copper  
 Insulator: Mat'l- Glass Filled LCP  
 Contacts: Mat'l: Copper Alloy  
 Finish: Contact Area -Gold Plate over Nickel Plate  
 Solder Tail - Tin Plate over Nickel Plate

**Electrical Specifications**  
 Rated Voltage: 30V AC (rms)  
 Contact Current Rating: 1A Max.  
 Contact Resistance: 30 milliohms Max.  
 Dielectric Withstanding: 750V AC  
 Operating Temperature: -55°C to 85°C



**ACTUAL SIZE**

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

<b>KEYSTONE ELECTRONICS CORP.</b>			
www.keystec.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900			
PART NAME <b>USB A-TYPE DUAL-HORIZONTAL SOCKET</b>			
MATERIAL		AS NOTED	
FINISH		AS NOTED	
TOLERANCES	INCH	[MM]	CODE
DECIMAL	$\pm .010$	[ $\pm 0.25$ ]	C
ANGULAR	$\pm 1^\circ$		
			DWG NO.
			<b>922</b>
DRN BY	NT	DATE	6.18.98
APP'D	LN	SCALE	2X