


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/18/13	

APPROVED: _____
 DATE: _____ TITLE: _____

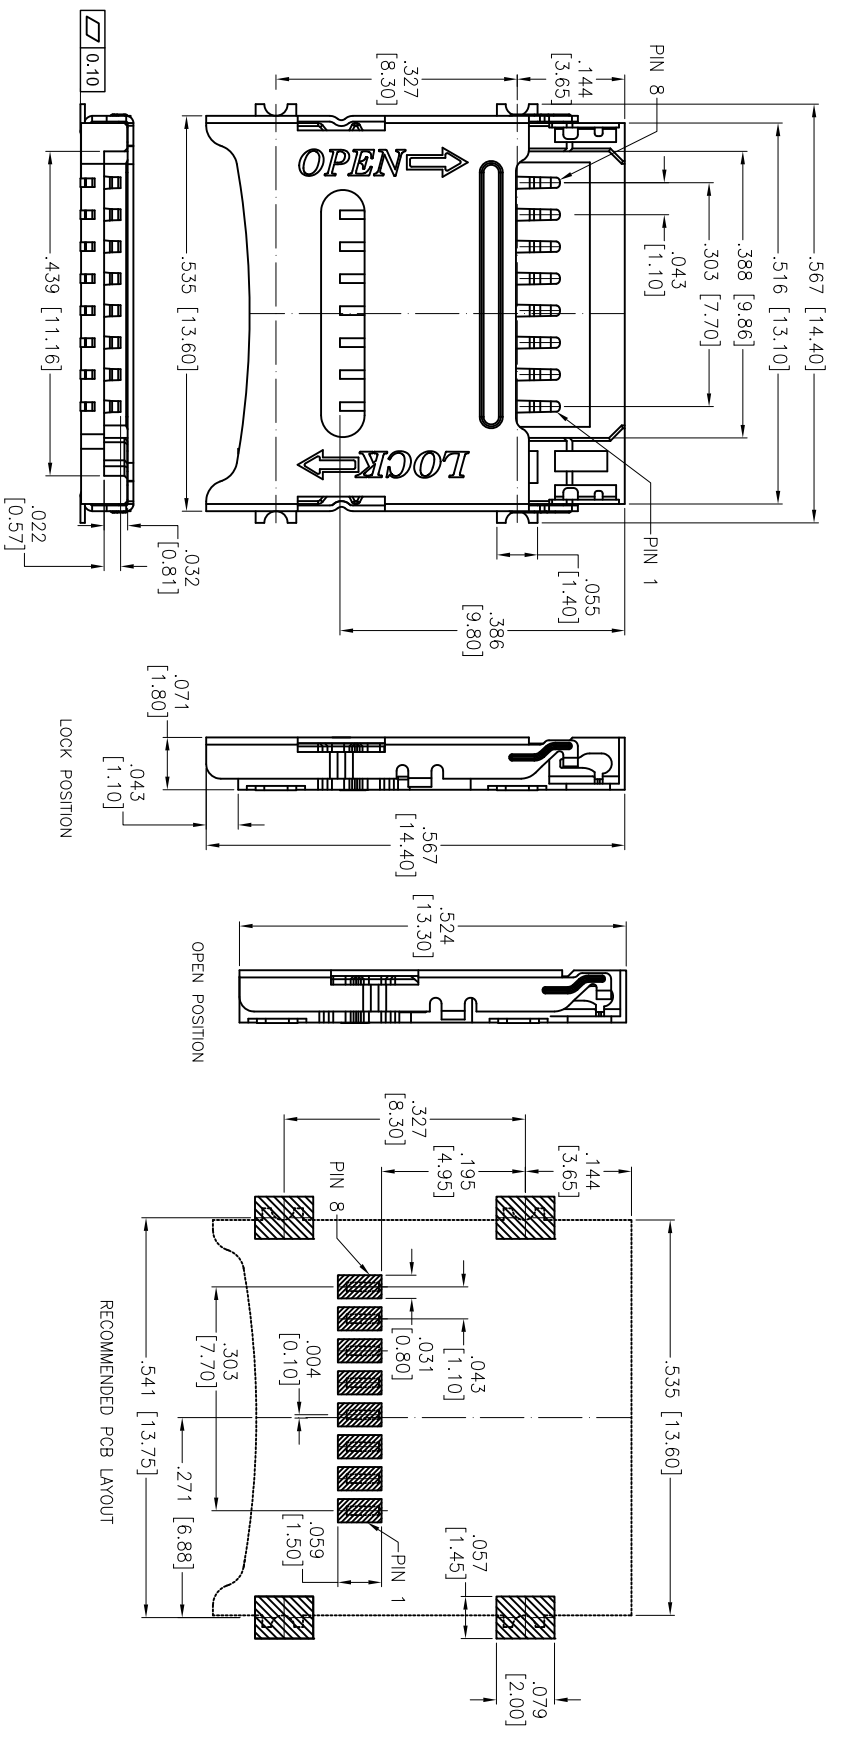

PACKAGED ON TAPE & REEL

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

MICRO SD SOCKET & PIN, HINGE TYPE,
 SEL-GOLD PLATED, TAPE & REEL

SPECIFICATIONS:
 Material: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Stator: Copper Alloy
 Shell: Stainless Steel
 Plating:
 Gold over Nickel underplate in contact area,
 Matte Tin over Copper underplate on solder tails
 Electrical:
 Current rating: 1.0 Amps min.
 Rated Voltage: 30V
 Contact resistance: 50m ohms max.
 Insulation resistance: 100M ohms min @ 100 VDC
 Dielectric withstanding voltage: 100 VAC for 1 minute
 Temperature Ratings:
 Operating temperature: -30°C to +80°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDERS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	HR
CHECKED	SC
APPROVED	

REF: S000708C	SCALE: NTS	SHEET 1 OF 1
SIZE	PART NO.	REV.
X	MOSP-R-08-A-SG-HC-T/R	