

PLIER TAP CONNECTOR For appliance electrical wiring

PT CONNECTOR





SPECIFICATION

MATERIAL Contact : Brass (Tin plated)
Body : Polypopylene

RATED VOLTAGE 600V

RATED CURRENT 7A (0.9mm²)
15A (2.0mm²)

RATED TEMPERATURE 105 (MAX)




PART NUMBER	Nominal Size mm ²	Type of branch	WIRE RANGE			Max. Wire O.D.	COLOR	STD QTY/BOX
			SOLID mm	STRANDEDmm ²	AWG			
PT V-09	0.9	1branch	0.65 ~ 1.0	0.5 ~ 0.9	20-18	3.05	Red	100
PT V-20	2.0		1.0 ~ 1.6	1.25 ~ 2.0	18-14	3.68	Blue	
PT W-09	0.9	2branch	0.65 ~ 1.0	0.5 ~ 0.9	20-18	3.05	Red	100
PT W-20	2.0		1.0 ~ 1.6	1.25 ~ 2.0	18-14	3.68	Blue	
PT R-09	0.9	Ends	0.65 ~ 1.0	0.5 ~ 0.9	20-18	3.05	Red	100
PT R-20	2.0		1.0 ~ 1.6	1.25 ~ 2.0	18-14	3.68	Blue	

NOTE

- 1) If it is stranded wire, diameter of the strand must be bigger than 0.32mm.
Insulation material of the wire should be PVC.

SPTV CONNECTOR

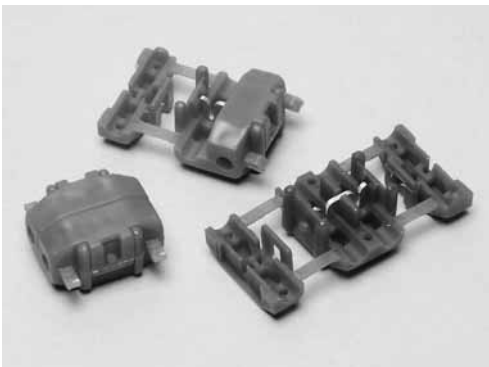



SPECIFICATION

MATERIAL Contact : Brass (Tin plated)
Body : Polypopylene

RATED VOLTAGE 300V

RATED CURRENT 5A (0.85mm²)
10A (2.0mm²)

RATED TEMPERATURE 75 (MAX)



PART NUMBER	Nominal Size mm ²	Type of branch	WIRE RANGE			Max. Wire O.D.	COLOR	STD QTY/BOX
			SOLID mm	STRANDEDmm ²	AWG			
SPTV 09	0.9	1branch	0.8 ~ 1.0	0.5 ~ 0.85	20-18	1.5 ~ 2.8	RED	100
SPTV 20	2.0		1.2 ~ 1.6	1.25 ~ 2.0	16-14	2.0 ~ 3.4	BLUE	

NOTE

- 1) If it is stranded wire, diameter of the strand must be bigger than 0.32mm.
Insulation material of the wire should be PVC.