



APPROVAL		
Electrical		
Standard	UL	IEC
Rated voltage	250V	630V
Rated current	30A	32A
Wire range	24-10AWG	4.0mm ²
Withstanding voltage	AC3000V/1Min	
Mechanical		
Torque	0.5Nm(4.4Lb-In)	
Ambient temperature	-40°C~+105 °C	
Strip length	14mm	
Dimensions		
pitch	7.62mm(. 300")	
Poles	1P-XXP	
Material		
Housing	PA66,UL94V-0	
Screws	M3,Steel, Cr ³⁺ Znplated	
Pin header	Copper, Tin-plated	
Cage	Steel,Cr ³⁺ Znplated	

HOW TO ORDER :

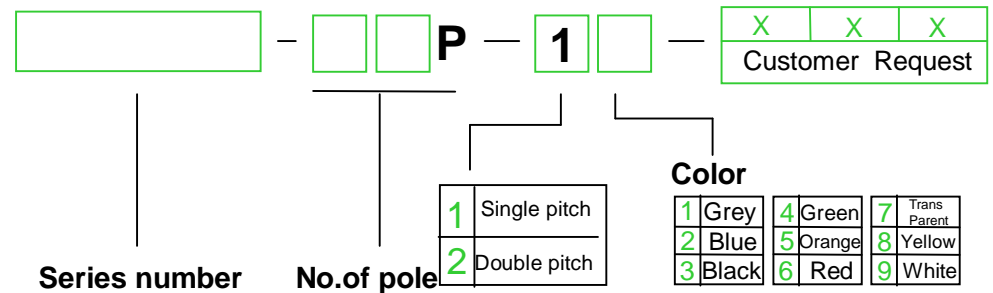

mm (INCH)	 DEGSON ELECTRONICS CO., LTD.
THROANGLE PROJECTION	NAME DG107V-7.62