
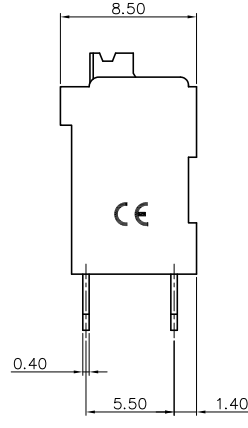
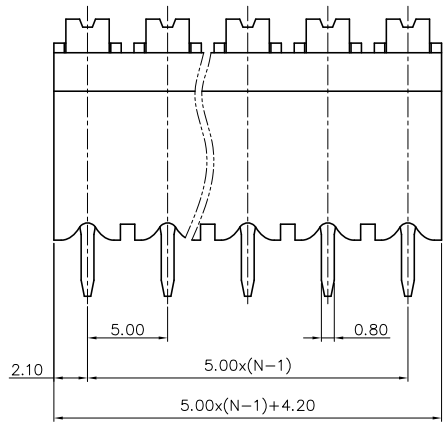
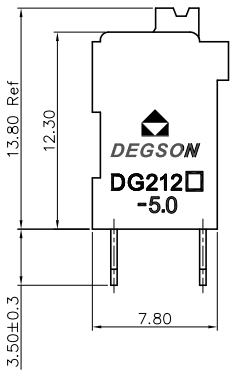


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

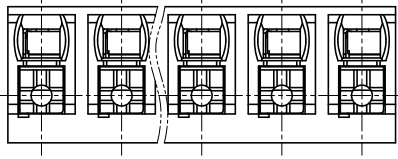


NOTES1:  
 UL Standard  
 1. Rated voltage/current : 300V / 12A  
 2. Withstanding voltage : AC1600V/1Min.  
 3. Wire range : 24~16AWG  
 IEC Standard

Pollution Degree	2	2	3
Overvoltage Category	II	III	III
Rate Impulse Voltage(KV)	4.0KV	4.0KV	4.0KV
Rate Voltage(V)	500V	320V	250V
Rate Current(A)	17.5A		

1. Wire range : 0.2~1.5mm<sup>2</sup>  
 NOTES2:  
 1. Dimension shall be interpreted per ASME Y14.5-2009  
 2. Pitch : 5.00mm, Poles : N=02~24P  
 3. Stripping length : 8~9mm  
 4. Operating temperature: -40°C~+130°C  
 5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range in mm				0.1/10		
Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	≤		
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6. RoHS Compliance

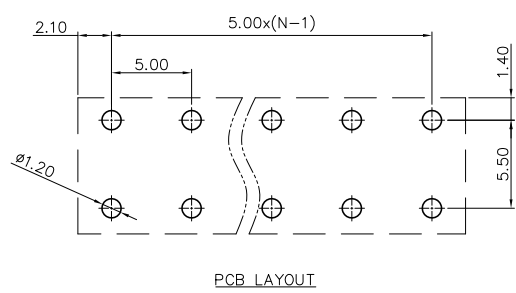

DG212V - THR - 5.0 - XXP - 1Y - 00A (H)  
 (RoHS)  
 00A - (Standard)  
 (Series No.) (Through Holes Reflow) (Pitch) (Poles) (Single Pitch) (Color) : 1.(Grey) 3.(Black) 5.(Orange) 9.(White)

PART NO.:	/			NINGBO DEGSON ELECTRICAL CO., LTD	
APPD:	/			NAME: DG212V-THR-5.0-XXP-1Y-00A(H)	
CHKD:	/			TITLE: CUSTOMER DRAWING	
DRFT:	/			DRAWING NO.: /	
THIRD ANGLE PROJECTION				DO NOT SCALE DRAWING	
				REV	DO
				1/1	1/1
				SCALE	1:1