



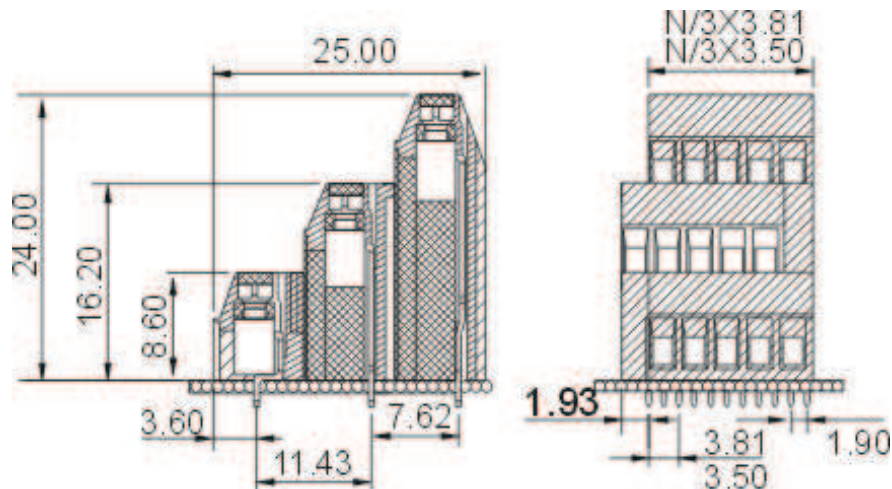

# DEGSON ELECTRONICS CO., LTD.

## Product Specification

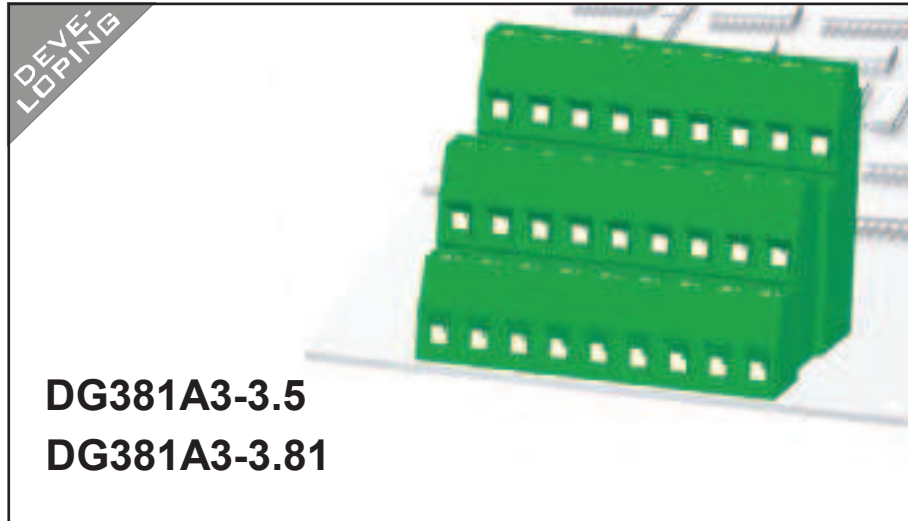

<b>APPROVAL</b>		
<b>Electrical</b>		
Standard	<b>UL</b>	<b>IEC</b>
Rated voltage	150V	130V
Rated current	10A	10A
Wire range	26-16AWG	1.0mm <sup>2</sup>
Withstanding voltage	AC1250V/1Min	
<b>Menchanical</b>		
Torque	0.2Nm(1.7Lb-In)	
Ambient temperature	-40°C~+105 °C	
Strip length	5mm	
<b>Dimensions</b>		
pitch	3.5mm(.138" ) 3.81mm(.150" )	
Poles	3*(2P,3P-24P)	
<b>Material</b>		
Housing	PA66,UL94V-0	
Screws	M2,Steel, Cr <sup>3+</sup> Znplated	
Pin header	Phosphor bronze,Tin-plated	
Cage	Brass,Ni-plated	

### HOW TO ORDER :

-  **P** -   - 

X	X	X
Customer Request		

Series number:   
 No. of pole: 

1	Single pitch
2	Double pitch

  
 Color: 

1 Grey	4 Green	7 Trans Parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White

 mm (INCH)	 <b>DEGSON ELECTRONICS CO., LTD.</b>
 THROANGLE PROJECTION	<b>NAME DG381A3-3.5 DG381A3-3.81</b>