

Printview: Male connector; with CAGE CLAMP® connection; for flying leads; pin spacing 5 mm / 0.197 in; 8-pole - Item No.: 769-608

WAGO® online catalog / eShop

Male connector; with CAGE CLAMP® connection; for flying leads; pin spacing 5 mm / 0.197 in; 8-pole

Item No.: 769-608



Male connector; with CAGE CLAMP® connection; for flying leads; pin spacing 5 mm / 0.197 in; 8-pole

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	769-608
GTIN / EAN	4044918521338
Content	1
Order amount	25
Customer item number	

Notes

Technical data


Miscellaneous


No. of poles	8
Pin spacing	5 mm / 0.197 in %
Total number of connection points	8
Total number of potentials	8
Color	gray
Pollution degree (1)	3
Rated voltage EN (1) [V]	500 [V]
Rated surge voltage (1) [kV]	6 [kV]
Nominal current [A]	32 [A]

Printview: Male connector; with CAGE CLAMP® connection; for flying leads; pin spacing 5 mm / 0.197 in;
8-pole - Item No.: 769-608

Technical data	
<i>Connection technology (1)</i>	<i>CAGE CLAMP®</i>
<i>Nominal cross section 1</i>	<i>4 mm²</i>
<i>Solid sizes 1</i>	<i>0.08 ... 4 mm² / 28 ... 12 AWG</i>
<i>Fine-stranded wires 1</i>	<i>0.08 ... 4 mm² / 28 ... 12 AWG</i>
<i>Strip length 1</i>	<i>8 ... 9 mm / 0.31 ... 0.35 in</i>
<i>Type of wiring</i>	<i>Front-entry wiring</i>
<i>Insulating material</i>	<i>Polyamide 66 (PA 66)</i>
<i>Fire load [MJ]</i>	<i>0.466 [MJ]</i>
<i>Weight [g]</i>	<i>23.408 [g]</i>
<i>Width</i>	<i>43.6 mm / 1.717 in</i>
<i>Height</i>	<i>18.3 mm / 0.72 in</i>
<i>Length</i>	<i>40.2 mm / 1.583 in</i>

Images & drawings

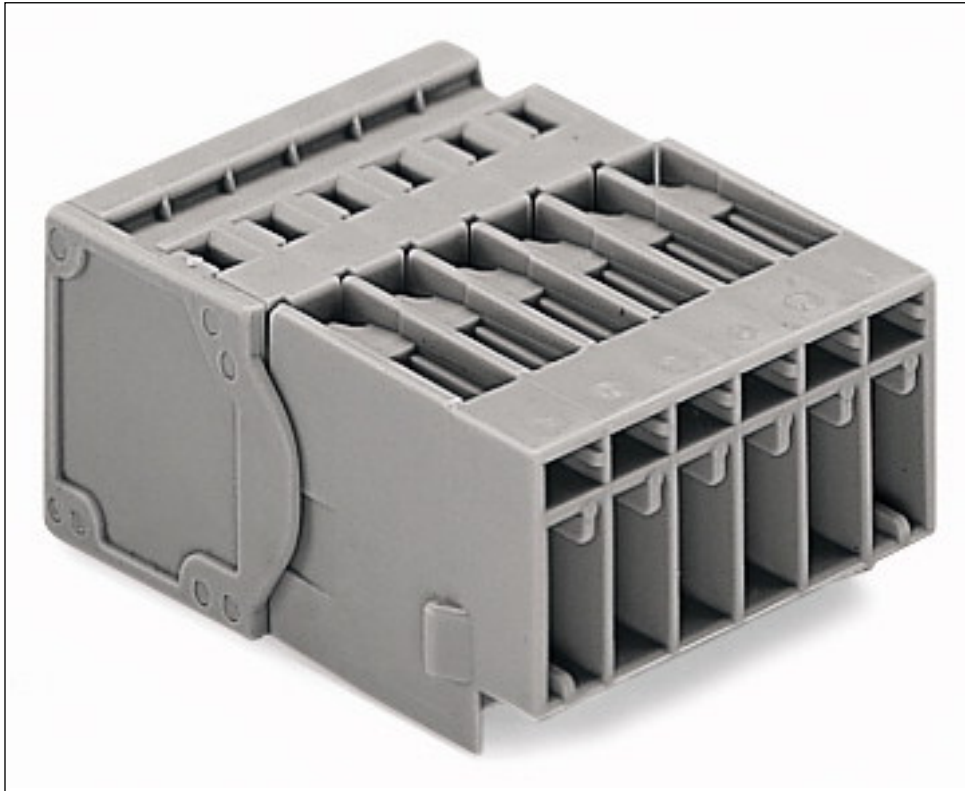

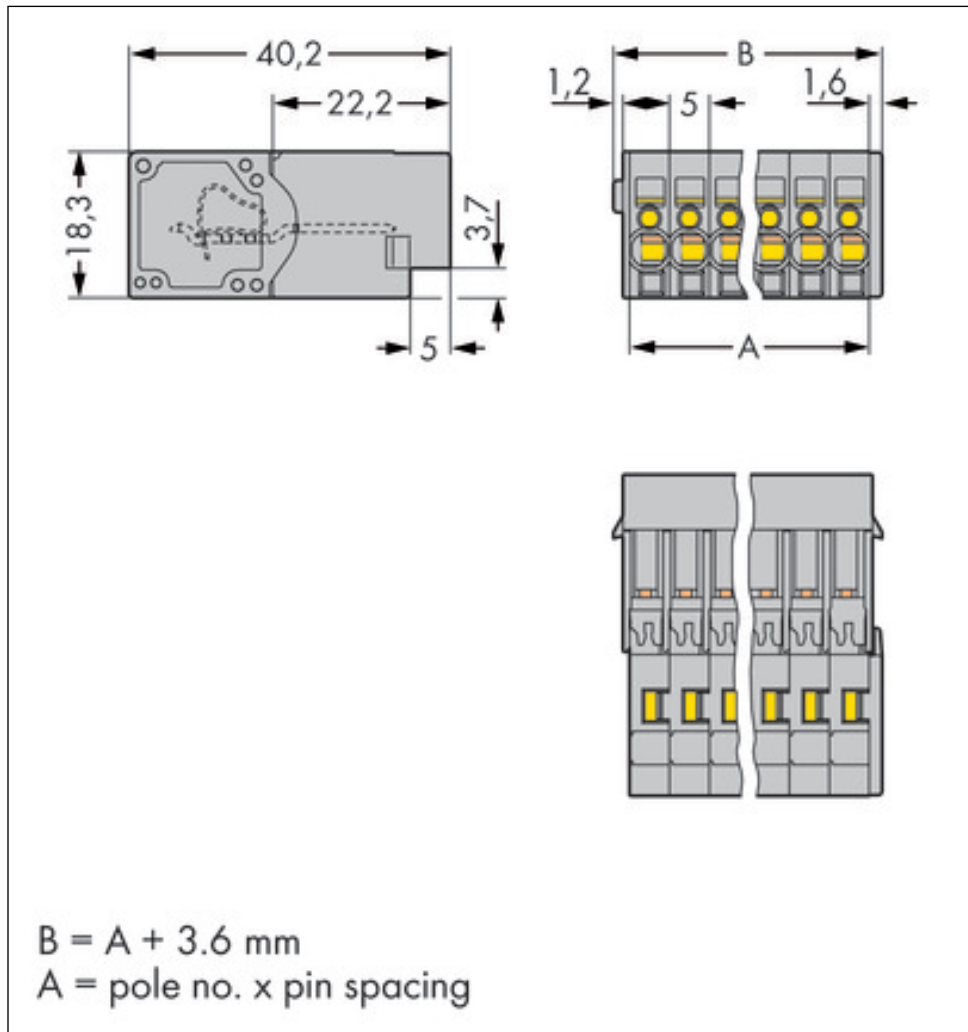

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.