
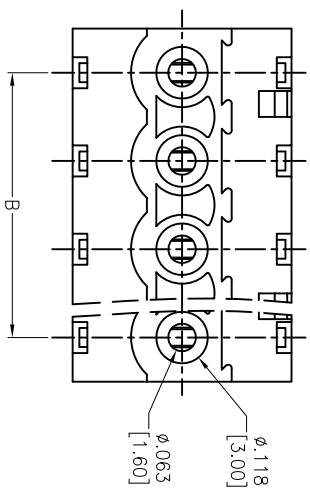


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/2/14	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

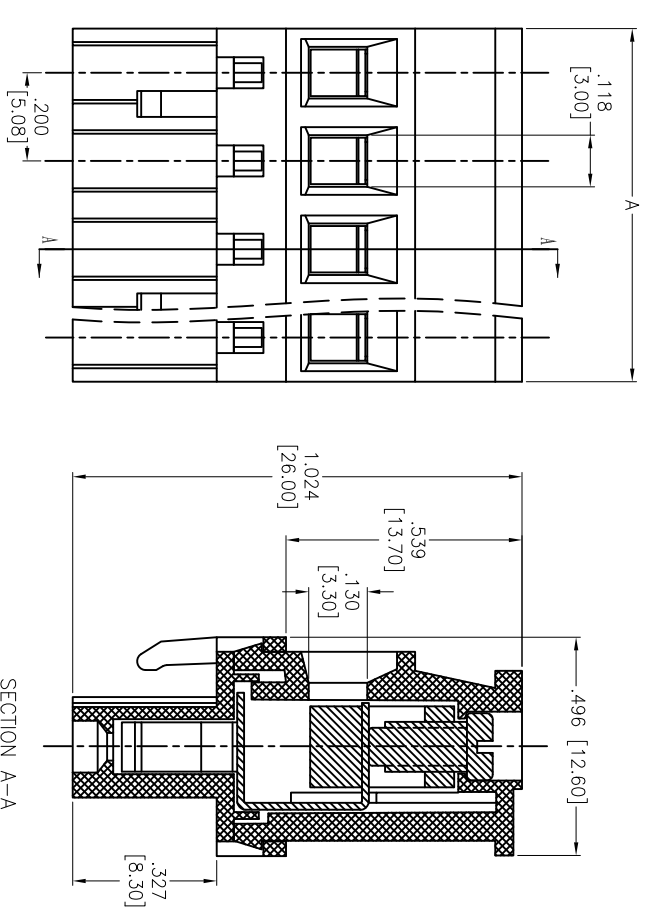

Positions: 2 thru 24  
 A = .200 [5.08] x No. of Positions  
 B = .200 [5.08] x No. of Spaces

**SPECIFICATIONS:**

- Material: Insulator: PA66, rated UL 94V-0
- Insulator color: Green
- Wire guard: M3, Steel, Zinc plated
- Clamp: Brass, Nickel plated
- Wire guard: Phosphor Bronze, Nickel plated
- Electrical: Operation voltage: 300 VAC
- Current rating: 15 Amps
- Contact resistance: 20 mohms max
- Insulation resistance: 500 Mohms min @ 500 VDC
- Dielectric withstanding voltage: 2,000 VAC for 1 minute
- Wire range: 28-14 AWG, 2.5mm<sup>2</sup>
- Torque (lb-in): 4.5
- Wire strip length: 7-8mm
- Temperature Rating: Operating temperature: -40°C to +105°C
- Environmental: Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLEES

.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

EURO BLOCK, .200 [5.08] PITCH

APPROVALS	DATE	
DRAWN	HR	5/2/14
CHECKED	SY	5/2/14
APPROVED		

SIZE	PART NO.	REV.
X	EB9A-XX-D	-
REF:	S00067C	SHEET 1 OF 1
SCALE:	NTS	