
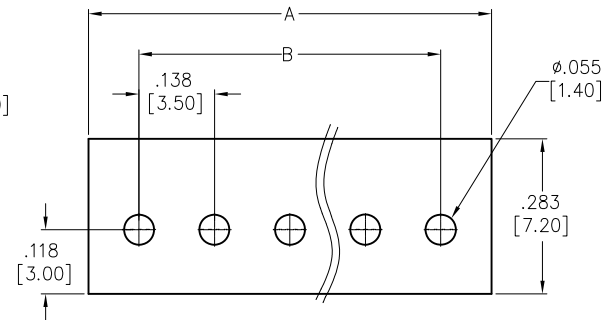
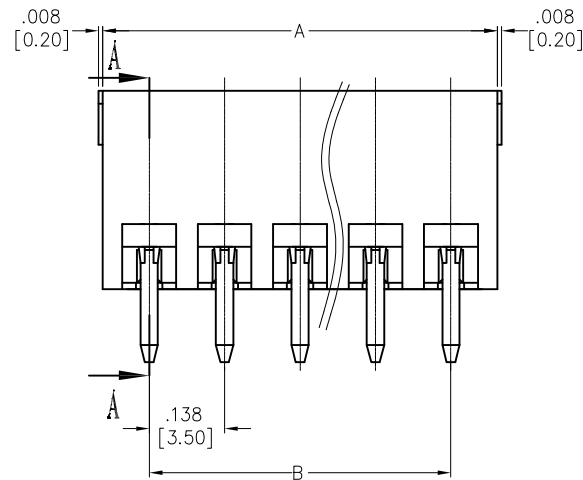
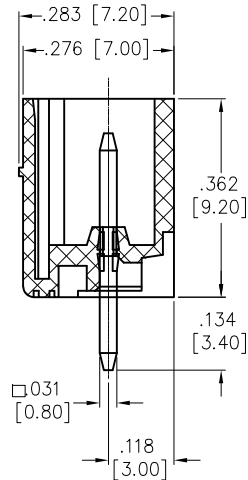


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/13/14	
A		UPDATE SHAPE	10/27/14	AY/NP

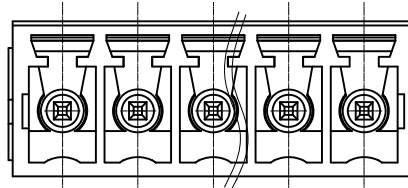

SPECIFICATIONS:

Material:
 Insulator: PA66, rated UL 94V-0
 Insulator color: Green
 Contact: Brass, Tin plated
 Electrical:
 Operation voltage: 300 VAC max
 Current rating: 8 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 500 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 2,000 VAC for 1 minute
 Environmental:
 Operating temperature: -40°C to +105°C
 Lead free, RoHS compliant.



Positions: 02 thru 24

A= .138 [3.50] x No. of Spaces + .169 [4.30]

B= .138 [3.50] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 TERMINAL BLOCK, STRAIGHT, .138" [3.50] PITCH

APPROVALS		DATE
DRAWN	AY	6/13/14
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	EBRA-XX-A	A
REF: S00067C	SCALE: NTS	SHEET 1 OF 1