
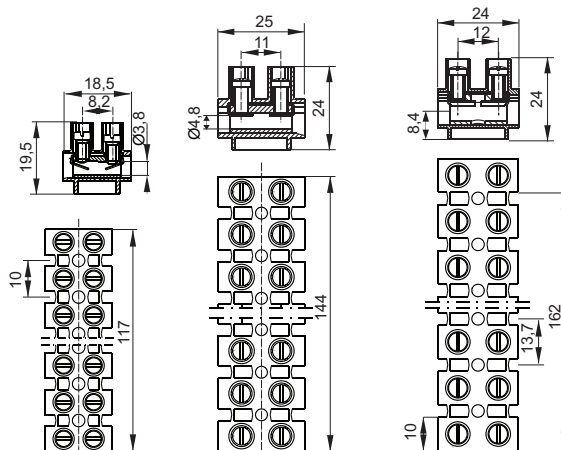


Thread terminal blocks type TLZ...N 12-line¹⁾ with nominal cross-section 4; 10; 16mm² and a washer to prevent cutting a conductor

TLZ...N

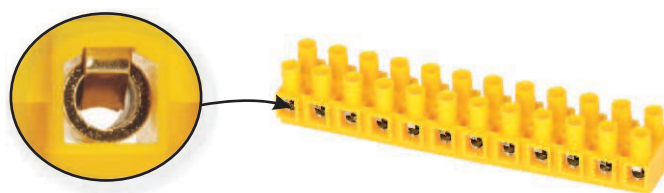

TYPE	TLZ-4N	TLZ-10N	TLZ-16N
Catalogue number	12-22N□	12-23N□	12-24N□
Colour	yellow-1 ● white-2 ○ black-3 ● grey-8 ●	yellow-1 ● white-2 ○ black-3 ● grey-8 ●	yellow-1 ● white-2 ○ black-3 ● grey-8 ●
Standard	IEC 60947-7-1	IEC 60947-7-1	IEC 60947-7-1
Nominal cross-section	4mm ²	10mm ²	16mm ²
Nominal connectivity: wire/cord	0,75...4mm ²	0,75...10 / 0,75...6mm ²	1...16 / 1...10mm ²
Nominal voltage of insulation	690V	690V	690V
Nominal impulse withstand voltage	6kV	6kV	8kV
Nominal continuous current	32A	57A	76A
Terminal torque	0,8Nm	1,2Nm	1,2Nm
Stripping length	7mm	8mm	9mm
Insulating material	polyamide	polyamide	polyamide
Ambient temperature	-25...+100°C	-25...+100°C	-25...+100°C
Weight	42g	94g	89g
Package	50pcs.	50pcs.	50pcs.

Equipment and accessories

EQUIPMENT	PAGE	TLZ-4N	TLZ-10N	TLZ-16N
Mounting base - single	52	P1-4N	P1-10N	P1-16N
Mounting base - double	52	P2-4N	P2-10N	P2-16N

¹⁾ Can be used for a smaller number of lines (cut with a knife and break off)