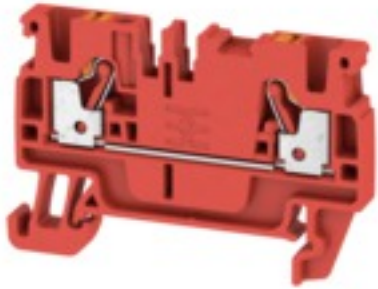


**A-series  
A2C 2.5 RD**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Spring connection with PUSH IN Technology**

The innovative PUSH IN technology reduces the amount of time you spend on wiring to a minimum. Direct insertion guarantees high conductor pull-out forces and simple handling for all conductor types.

**General ordering data**

Type	A2C 2.5 RD
Order No.	<a href="#">1521900000</a>
Version	Feed-through terminal, PUSH IN, 2.5 mm <sup>2</sup> , 800 V, 24 A, Red
GTIN (EAN)	4050118328332
Qty.	100 pc(s).

**A-series  
A2C 2.5 RD**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Dimensions and weights**

Width	5.1 mm	Width (inches)	0.201 inch
Height	55 mm	Height (inches)	2.165 inch
Depth	36.5 mm	Depth (inches)	1.437 inch
Depth including DIN rail	37 mm	Net weight	6.335 g

**Temperatures**

Continuous operating temp., min.	-60 °C	Continuous operating temp., max.	130 °C
----------------------------------	--------	----------------------------------	--------

**Material data**

Material	Wemid	Colour	Red
Colour of operational elements	Orange	UL 94 flammability rating	V-0

**Rating data IECEx/ATEX**

Certificate No. (ATEX)	TUEV16ATEX7909U	Certificate No. (IECEX)	IECEXTUR16.0036U
Max. voltage (ATEX)	550 V	Current (ATEX)	20 A
Wire cross section max. (ATEX)	2.5 mm <sup>2</sup>	Max. voltage (IECEX)	550 V
Current (IECEX)	20 A	Wire cross section max. (IECEX)	2.5 mm <sup>2</sup>
Marking EN 60079-7	Ex eb II C Gb		

**System specifications**

End cover plate required	Yes	Number of potentials	1
Number of levels	1	No. of clamping points per level	2
Number of potentials per tier	1	PE connection	No
Mounting rail	TS 35	N-function	No
PE function	No	PEN function	No

**Additional technical data**

Installation advice	Mounting rail	Open sides	right
Snap-on	No	Type of fixing	Snap-on
Type of mounting	TS 35	With snap-in pegs	No

**CSA rating data**

Certificate No. (CSA)	200039-70089609	Current size B (CSA)	20 A
Current size C (CSA)	20 A	Current size D (CSA)	5 A
Voltage size B (CSA)	600 V	Voltage size C (CSA)	600 V
Voltage size D (CSA)	600 V	Wire cross section max. (CSA)	12 AWG
Wire cross section min. (CSA)	28 AWG		

**A-series  
A2C 2.5 RD**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Conductors for clamping (rated connection)**

Blade size	0.6 x 3.5 mm	Clamping range, max.	2.5 mm <sup>2</sup>
Clamping range, min.	0.14 mm <sup>2</sup>	Connection cross-section, stranded, max.	2.5 mm <sup>2</sup>
Connection cross-section, stranded, min.	0.5 mm <sup>2</sup>	Connection direction	top
Gauge to IEC 60947-1	A3	Number of connections	2
Stripping length	10 mm	Twin wire-end ferrules, max.	0.75 mm <sup>2</sup>
Twin wire-end ferrules, min.	0.5 mm <sup>2</sup>	Type of connection	PUSH IN
Wire connection cross section AWG, max.	AWG 12	Wire connection cross section AWG, min.	AWG 28
Wire connection cross section, finely stranded, max.	2.5 mm <sup>2</sup>	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	2.5 mm <sup>2</sup>
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0.5 mm <sup>2</sup>	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	2.5 mm <sup>2</sup>
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.5 mm <sup>2</sup>	Wire connection cross-section, finely stranded, min.	0.5 mm <sup>2</sup>
Wire connection cross-section, solid core, max.	2.5 mm <sup>2</sup>	Wire connection cross-section, solid core, min.	0.5 mm <sup>2</sup>

**Rating data**

Rated cross-section	2.5 mm <sup>2</sup>	Rated voltage	800 V
Rated current	24 A	Current at maximum wires	24 A
Standards	IEC 60947-7-1	Volume resistance according to IEC 60947-7-x	1.33 mΩ
Rated impulse withstand voltage	8 kV	Pollution severity	3
Surge voltage category	III		

**UL rating data**

Certificate No. (cURus)	E60693	Conductor size Factory wiring max. (cURus)	12 AWG
Conductor size Factory wiring min. (cURus)	28 AWG	Conductor size Field wiring max. (cURus)	12 AWG
Conductor size Field wiring min. (cURus)	28 AWG	Current size B (cURus)	20 A
Current size C (cURus)	20 A	Current size D (cURus)	5 A
Voltage size B (cURus)	600 V	Voltage size C (cURus)	600 V
Voltage size D (cURus)	600 V		

**Classifications**

ETIM 5.0	EC000897	ETIM 6.0	EC000897
eClass 6.2	27-14-11-20	eClass 7.1	27-14-11-20
eClass 8.1	27-14-11-20	eClass 9.0	27-14-11-20
eClass 9.1	27-14-11-20		

**Approvals**

Approvals				IEC EX ATEX
ROHS	Conform			

**Data sheet****A-series  
A2C 2.5 RD**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data****Downloads**

Approval/Certificate/Document of Conformity	<a href="#">CFAT_A2C_2.5.pdf</a> <a href="#">IECEX_TUR_16.0036U_2.pdf</a> <a href="#">TÜV_16_ATEX_7909_U.pdf</a> <a href="#">DE_PT0101_20160614_012_ISSUE01.pdf</a>
Engineering Data	<a href="#">EPLAN_WSCAD_Zuken_E3.S</a>
Engineering Data	<a href="#">STEP</a>
User Documentation	<a href="#">NTI_A2C_2.5.pdf</a> <a href="#">NTI_ALO_6.pdf</a>

**Safety note**


Safety notice	<a href="#">Safety Information</a>
---------------	------------------------------------

**Data sheet**

**A-series**  
**A2C 2.5 RD**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**



**A-series  
A2C 2.5 RD**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Accessories**

**DEK 5/5**



**WS/ DEK**

MultiMark DEK/WS connector markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

**Your benefits with MultiMark**

- Compatible with Weidmüller modular terminal blocks
- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High levels of flexibility thanks to manufacturer-independence

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.
DEK 5/5 MM	<a href="#">2007110000</a>	Dekafix, Terminal marker,	4050118391862800	pc(s).
WS		5 x 5 mm, Weidmueller, White		

**Blank**



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with laser printer, PrintJet ADVANCED, plotter or MC-Mobilo is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.
WS 10/5 MC	<a href="#">1773531693</a>	WS, Terminal marker, 10 x	4032248141814720	pc(s).
NE BL		5 mm, Pitch in mm (P): 5.00		

## A-series A2C 2.5 RD

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Accessories

	Weidmueller, Allen-Bradley, Blue
WS 10/5 M <a href="#">2003770000</a> PLUS MC NE WS	WS, Terminal marker, 10 x 4050118424447 600 pc(s). 5 mm, Pitch in mm (P): 5.00 Weidmueller, Allen-Bradley, White
WS 10/5 MC <a href="#">1773531687</a> NE GE	WS, Terminal marker, 10 x 4032248141753 720 pc(s). 5 mm, Pitch in mm (P): 5.00 Weidmueller, Allen-Bradley, Yellow
WS 10/5 MC <a href="#">1773531686</a> NE RT	WS, Terminal marker, 10 x 4032248141746 720 pc(s). 5 mm, Pitch in mm (P): 5.00 Weidmueller, Allen-Bradley, Red
WS 10/5 MC <a href="#">1635000000</a> NE WS	WS, Terminal marker, 10 x 4008190261948 720 pc(s). 5 mm, Pitch in mm (P): 5.00 Weidmueller, Allen-Bradley, White
WS 10/5 <a href="#">1046380000</a> PLUS MC NE WS	WS, Terminal marker, 10 x 4032248782086 600 pc(s). 5 mm, Pitch in mm (P): 5.00 Weidmueller, Allen-Bradley, White
WS 10/5 M <a href="#">1792000000</a> MC NE WS	WS, Terminal marker, 10 x 4032248223862 720 pc(s). 5 mm, Pitch in mm (P): 5.00 Weidmueller, Allen-Bradley, White

## VO



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.
DEK 5/5 MC <a href="#">1388530000</a> NE VO WS		Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, White	4050118188622	1,000 pc(s).

## A-series A2C 2.5 RD

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

# Accessories

## Plus



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

### General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.
DEK 5/5 PLUS MC NE WS	<a href="#">1854490000</a>	Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, White	4032248393596	1,000 pc(s).
DEK 5/5 PLUS MC NE GE	<a href="#">1907520000</a>	Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Yellow	4032248532100	1,000 pc(s).

## Test adapter



### Spring connection with PUSH IN Technology

The innovative PUSH IN technology reduces the amount of time you spend on wiring to a minimum. Direct insertion guarantees high conductor pull-out forces and simple handling for all conductor types.

### General ordering data

Type	Order No.	GTIN (EAN)	Qty.
ATPG 2.5/5	<a href="#">2041180000</a>	4050118409505	25 pc(s).
ATPG 2.5/3	<a href="#">2041190000</a>	4050118409604	25 pc(s).
ATPG 1.5-10 L	<a href="#">1991890000</a>	4050118376647	50 pc(s).
ATPG 2.5 MI-R	<a href="#">1991960000</a>	4050118376685	50 pc(s).



## A-series A2C 2.5 RD

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Accessories

### Digital multimeters




Multimeters are capable of measuring a number of variables. Each instrument can measure voltage and resistance, as well as performing continuity and diode testing as standard. In addition, the individual multimeters also feature extra measuring options such as current, frequency, capacitance and temperature. Digital multimeters have the advantage of a clear display which can be read easily and directly. With these instruments, mistakes arising from faulty conversion of the measuring ranges or misreading the display are a thing of the past.

#### General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.
ZUB MULTIMETER	<a href="#">9205270000</a>	Multimeter	4032248723522	1 pc(s).

### End brackets



**Spring connection with tension clamp Technology**  
 Tension clamp technology is a universal contact system for all common conductor connection types. Its fantastic level of flexibility makes the tension clamp a profitable alternative connection.

#### General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.
ZEW 35 V0	<a href="#">1264170000</a>	Z-series, End bracket	4050118137170	20 pc(s).
ZEW 35 GR	<a href="#">1238040000</a>	Z-series, End bracket	405011802440	120 pc(s).
ZEW 35	<a href="#">9540000000</a>	Z-series, End bracket	4008190956264	20 pc(s).

### End brackets



**Spring connection with PUSH IN Technology**  
 The innovative PUSH IN technology reduces the amount of time you spend on wiring to a minimum. Direct insertion guarantees high conductor pull-out forces and simple handling for all conductor types.

#### General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.
AEB 35 SC/1 BK	<a href="#">2475310000</a>	A-series, End bracket	4050118487114	50 pc(s).

## A-series A2C 2.5 RD

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com


## Accessories

AEB 35 SC/1 [1991920000](#)

A-series, End bracket

4050118376722 50 pc(s).

## Custom printing



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.
DEK 5/5 MC SDR	<a href="#">1609810000</a>	Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, To customer specification	4008190456597	200 pc(s).
DEK 5/5 PLUS MC SDR	<a href="#">1854500000</a>	Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, To customer specification	4032248393602	200 pc(s).
DEK 5/5 S MC SDR	<a href="#">1341590000</a>	Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, To customer specification	4050118146042	80 pc(s).

## End plates



### Spring connection with PUSH IN Technology

The innovative PUSH IN technology reduces the amount of time you spend on wiring to a minimum. Direct insertion guarantees high conductor pull-out forces and simple handling for all conductor types.

## General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.
AEP 2C 2.5 BL	<a href="#">1514420000</a>	A-series, End plate	4050118436136	50 pc(s).

Creation date October 2, 2018 3:10:19 PM CEST

## A-series A2C 2.5 RD

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

## Accessories

AEP 2C 2.5	<a href="#">2052290000</a>	A-series, End plate	4050118411959 50 pc(s).
OR			
AEP 2C 2.5	<a href="#">1514400000</a>	A-series, End plate	4050118436112 50 pc(s).

## Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.
DEK 5/5 MC NE GN	<a href="#">1609801688</a>	Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Green	4008190397142	1,000 pc(s).
DEK 5/5 MC NE RT	<a href="#">1609801686</a>	Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Red	4008190397128	1,000 pc(s).
DEK 5/5 S MC NE WS	<a href="#">1341620000</a>	Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, White	4050118145793	400 pc(s).
DEK 5/5 MC NE BR	<a href="#">1249870000</a>	Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Brown	4050118051865	1,000 pc(s).
DEK 5/5 MC NE BL	<a href="#">1609801693</a>	Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Blue	4008190397166	1,000 pc(s).
DEK 5/5 MC NE OR	<a href="#">1238340000</a>	Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Orange	4050118062632	1,000 pc(s).
DEK 5/5 MC NE SW	<a href="#">1457550000</a>	Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Black	4050118263817	1,000 pc(s).
DEK 5/5 MC NE VI	<a href="#">1249860000</a>	Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Violet	4050118042764	1,000 pc(s).
DEK 5/5 MC NE GR	<a href="#">1609801691</a>	Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Grey	4008190397159	1,000 pc(s).

Creation date October 2, 2018 3:10:19 PM CEST

## A-series A2C 2.5 RD

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Accessories

DEK 5/5 MC <a href="#">1609801687</a> NE GE	Dekafix, Terminal marker, 4008190397135 1,000 pc(s). 5 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Yellow
DEK 5/5 MC <a href="#">1609801044</a> NE WS	Dekafix, Terminal marker, 4008190397111 1,000 pc(s). 5 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, White

## Custom printing



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with laser printer, PrintJet ADVANCED, plotter or MC-Mobilo is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.
WS 8/5 PLUS MC SDR	<a href="#">1038790000</a>	WS, Terminal marker, 8 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Allen-Bradley, To customer specification	4032248768066	120 pc(s).
WS 8/5 MC SDR	<a href="#">1640750000</a>	WS, Terminal marker, 8 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Allen-Bradley, To customer specification	4008190456627	144 pc(s).

**A-series  
A2C 2.5 RD**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Accessories**
**WS 8/5**

**WS/ DEK**

MultiMark DEK/WS connector markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

**Your benefits with MultiMark**

- Compatible with Weidmüller modular terminal blocks
- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High levels of flexibility thanks to manufacturer-independence

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.
WS 8/5 MM	<a href="#">2007150000</a>	WS, Terminal marker, 8 x 5	4050118392029 800	pc(s).
WS		mm, Weidmueller, White		

**ZQV 2.5N**

**Spring connection with PUSH IN Technology**

The innovative PUSH IN technology reduces the amount of time you spend on wiring to a minimum. Direct insertion guarantees high conductor pull-out forces and simple handling for all conductor types.

**General ordering data**

Type	Order No.	GTIN (EAN)	Qty.
ZQV 2.5N/3	<a href="#">1527570000</a>	4050118448450	60 pc(s).
ZQV 2.5N/50	<a href="#">2109000000</a>	4050118486001	5 pc(s).
RD			
ZQV 2.5N/7	<a href="#">2108810000</a>	4050118448498	20 pc(s).
RD			
ZQV 2.5N/4	<a href="#">1527590000</a>	4050118448443	60 pc(s).
ZQV 2.5N/7	<a href="#">1527830000</a>	4050118448603	20 pc(s).
BL			
ZQV 2.5N/10	<a href="#">1527690000</a>	4050118447989	20 pc(s).

**A-series**  
**A2C 2.5 RD**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Accessories**

ZQV 2.5N/2 <a href="#">1527740000</a>	4050118448658	60 pc(s).
BL		
ZQV 2.5N/5 <a href="#">2108710000</a>	4050118448511	20 pc(s).
RD		
ZQV 2.5N/50 <a href="#">1527730000</a>	4050118411362	5 pc(s).
ZQV 2.5N/9 <a href="#">2108900000</a>	4050118448474	20 pc(s).
RD		
ZQV 2.5N/10 <a href="#">1527880000</a>	4050118448573	20 pc(s).
BL		
ZQV 2.5N/4 <a href="#">1527780000</a>	4050118448634	60 pc(s).
BL		
ZQV 2.5N/2 <a href="#">2108470000</a>	4050118448542	60 pc(s).
RD		
ZQV 2.5N/10 <a href="#">2108910000</a>	4050118486018	20 pc(s).
RD		
ZQV 2.5N/20 <a href="#">2108920000</a>	4050118485899	20 pc(s).
RD		
ZQV 2.5N/7 <a href="#">1527640000</a>	4050118448412	20 pc(s).
ZQV 2.5N/8 <a href="#">1527670000</a>	4050118448405	20 pc(s).
ZQV 2.5N/3 <a href="#">2108690000</a>	4050118448535	60 pc(s).
RD		
ZQV 2.5N/8 <a href="#">2108870000</a>	4050118448481	20 pc(s).
RD		
ZQV 2.5N/2 <a href="#">1527540000</a>	4050118448467	60 pc(s).
ZQV 2.5N/20 <a href="#">1527720000</a>	4050118447972	20 pc(s).
ZQV 2.5N/4 <a href="#">2108700000</a>	4050118448528	60 pc(s).
RD		
ZQV 2.5N/9 <a href="#">1527870000</a>	4050118448580	20 pc(s).
BL		
ZQV 2.5N/6 <a href="#">1527630000</a>	4050118448429	20 pc(s).
ZQV 2.5N/50 <a href="#">1527920000</a>	4050118448559	5 pc(s).
BL		
ZQV 2.5N/5 <a href="#">1527620000</a>	4050118448436	20 pc(s).
ZQV 2.5N/6 <a href="#">2108720000</a>	4050118448504	20 pc(s).
RD		
ZQV 2.5N/20 <a href="#">1527890000</a>	4050118448566	20 pc(s).
BL		
ZQV 2.5N/5 <a href="#">1527790000</a>	4050118448627	20 pc(s).
BL		
ZQV 2.5N/9 <a href="#">1527680000</a>	4050118447996	20 pc(s).
ZQV 2.5N/8 <a href="#">1527840000</a>	4050118448597	20 pc(s).
BL		
ZQV 2.5N/6 <a href="#">1527820000</a>	4050118448610	20 pc(s).
BL		
ZQV 2.5N/3 <a href="#">1527770000</a>	4050118448641	60 pc(s).
BL		

## A-series A2C 2.5 RD

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

# Accessories

## Custom printing



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with laser printer, PrintJet ADVANCED, plotter or MC-Mobilo is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data


Type	Order No.	Version	GTIN (EAN)	Qty.
WS 10/5 MC SDR	<a href="#">1635010000</a>	WS, Terminal marker, 10 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Allen-Bradley, To customer specification	4008190456634	144 pc(s).
WS 10/5 PLUS MC SDR	<a href="#">1046320000</a>	WS, Terminal marker, 10 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Allen-Bradley, To customer specification	4032248782024	120 pc(s).
WS 10/5 MC M SDR	<a href="#">1792010000</a>	WS, Terminal marker, 10 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Allen-Bradley, To customer specification	4032248223879	144 pc(s).
WS 10/5 M PLUS MC SDR	<a href="#">2007770000</a>	WS, Terminal marker, 10 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Allen-Bradley, To customer specification	4050118393279	120 pc(s).

## A-series A2C 2.5 RD

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Accessories

### Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with laser printer, PrintJet ADVANCED, plotter or MC-Mobilo is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

### General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.
WS 8/5 MC NE WS	<a href="#">1640740000</a>	WS, Terminal marker, 8 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Allen-Bradley, White	4008190279103 720	pc(s).
WS 8/5 MC NE BL	<a href="#">1773521693</a>	WS, Terminal marker, 8 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Allen-Bradley, Blue	4032248141715 720	pc(s).
WS 8/5 MC NE RT	<a href="#">1773521686</a>	WS, Terminal marker, 8 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Allen-Bradley, Red	4032248141531 720	pc(s).
WS 8/5 PLUS MC NE WS	<a href="#">1951870000</a>	WS, Terminal marker, 8 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Allen-Bradley, White	4032248631605 600	pc(s).
WS 8/5 MC NE OR	<a href="#">1773521690</a>	WS, Terminal marker, 8 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Allen-Bradley, Orange	4032248143092 720	pc(s).
WS 8/5 MC NE GE	<a href="#">1773521687</a>	WS, Terminal marker, 8 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Allen-Bradley, Yellow	4032248141548 720	pc(s).