
# **TERMINAL BLOCKS**

### Holder markers OZT-1<sup>1)</sup> i OZT-3<sup>1)</sup>

Descriptions can be written on the **OZT** markers with a felt-tip pen.

The **OZT-1** markers are intended for installing on holder types KU-1/35 and KU-2/35.

The **OZT-3** markers are intended for installing on KU-3 holders.





TYPE	OZT-1	OZT-3
Catalogue number	99-401□	99-402□
Colour <sup>1)</sup>	yellow-1 Owhite-2 O	yellow-1 Owhite-2 O
Insulating material	polyamide	polyamide
Ambient temperature	-25+100°C	-25+100°C
Package	25pcs.	10pcs.

## OT and OM labels for multipolar terminal blocks2)

The labels are intended for marking poles on terminal blocks. They are supplied as white strips. The markers without print can be with felt-tip pens.








TYPE	OT-4	OT-10	OM-4	OM-10
Catalogue number	51-8010	51-8020	51-8510	51-8520
Colour	white ○	white O	white O	white O
Print	per order or without print		to be agreed; applied by user	
Use	LZ-B4, TLZ-4	LZ-B10, TLZ-10	LZ-B4, TLZ-4	LZ-B10, TLZ-10
Fastening	two-sided adhesive tape			
Insulating material	PCV	PCV	PCV	PCV
Ambient temperature	-30+70°C	-30+70°C	-30+70°C	-30+70°C
Package	100pcs.	100pcs.	100pcs.	100pcs.

### **KU** holders

For positioning terminal blocks on the TS mounting rails.

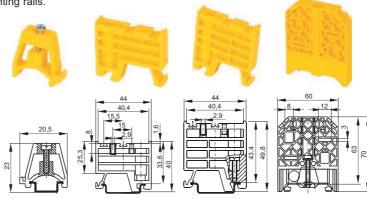

TYPE	KU-15	KU-1/35	KU-2/35	KU-3/35 <sup>3)</sup>
Catalogue number	44-3001	44-120	44-201□	44-500□
Colour	yellow O	yellow-1 ○ blue-6 ○ grey-8 ●	yellow-1 Oblue-6 grey-8	yellow-1 Oblue-6 grey-8
Fastening	TS-15	TS-35	TS-35	TS-35 TS2x35AI only on the "arms" side
Width	8,6mm	10mm	10mm	13mm
Insulating material	polyamide	polyamide	polyamide	polyamide
Ambient temperature	-25+100°C	-25+100°C	-25+100°C	-25+100°C
Package	25pcs.	30pcs.	30pcs.	30pcs.

#### **Equipment and accessories**

EQUIPMENT	<b>PAGE</b>	KU-15	KU-1/35	KU-2/35	KU-3/35
Markers	48	_	OZT-1, DK/Z	OZT-1, DK/Z	OZT-3, DK/Z

The markers are sold in white and yellow (other colours available on request)
Markers with print are available on request
Two KU-3 type holders can be used as supports for two 8x10 or 3x12 rails and can be additionally equipped with OZZ type protection cover