
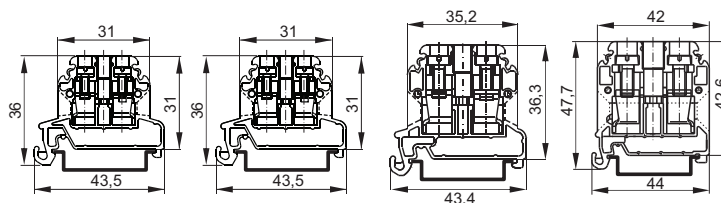


TERMINAL BLOCKS

Thread terminal blocks for cable cross-sections 2,5...16mm²

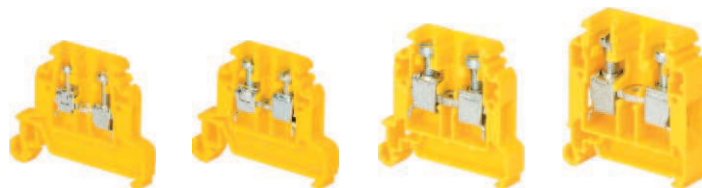

TYPE	ZG-G2,5	ZG-G4	ZG-G10	ZG-G16
Catalogue number	11-810	11-820	11-830	11-840
Colour	yellow-1 ● white-2 ○ black-3 ● green-5 ● blue-6 ● red-7 ● grey-8 ●	yellow-1 ● white-2 ○ black-3 ● green-5 ● blue-6 ● red-7 ● grey-8 ●	yellow-1 ● white-2 ○ black-3 ● green-5 ● blue-6 ● red-7 ● grey-8 ●	yellow-1 ● white-2 ○ black-3 ● green-5 ● blue-6 ● red-7 ● grey-8 ●
Standard	IEC 60947-7-1	IEC 60947-7-1	IEC 60947-7-1	IEC 60947-7-1
Nominal cross-section	2,5mm ²	4mm ²	10mm ²	16mm ²
Nominal connectivity: wire/cord	0,5...2,5mm ²	0,5...4mm ²	0,5...10 / 0,5...6mm ²	1,5...16 / 1,5...10mm ²
Nominal voltage of insulation	690V	690V	690V	690V
Nominal impulse withstand voltage	6kV	6kV	6kV	6kV
Nominal continuous current	24A	32A	57A	76A
Terminal torque	0,4Nm	0,5Nm	1,2Nm	2,0Nm
Stripping length	8mm	8mm	10mm	16mm
Width	5,2mm	6,4mm	8mm	12mm
Insulating material	polyamide	polyamide	polyamide	polyamide
Ambient temperature	-25...+100°C	-25...+100°C	-25...+100°C	-25...+100°C
Weight	6g	7g	13g	24g
Package	60pcs.	50pcs.	50pcs.	30pcs.

Equipment and accessories

EQUIPMENT	PAGE	ZG-G2,5	ZG-G4	ZG-G10	ZG-G16
Mounting rails	200	TS35	TS35	TS35	TS35
Holders	49	KU-1/35, KU-2/35	KU-1/35, KU-2/35	KU-1/35, KU-2/35	KU-1/35, KU-2/35, KU-3/35
End sections	51	PS-4	PS-4	PS-10	PS-16
Short-circuiting connectors	53	ZKU-2,5/...	ZKU-4/...	ZKU-10/...	ZKU-16/...
Cover	52	OZG-2,5	OZG-4	OZG-10	OZG-16
Markers	48	DK/Z-5	DK/Z-5, DK/Z-6	DK/Z-5, DK/Z-6	DK/Z-5, DK/Z-6
Protection cover	50	—	OZZ-3	—	—