

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- , - .

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

AF

50

P

LTR

DESCRIPTION

DATE

DWN

APVD



AZ1

REVISED PER ECR-12-018652

06NOV12

KH

GJ

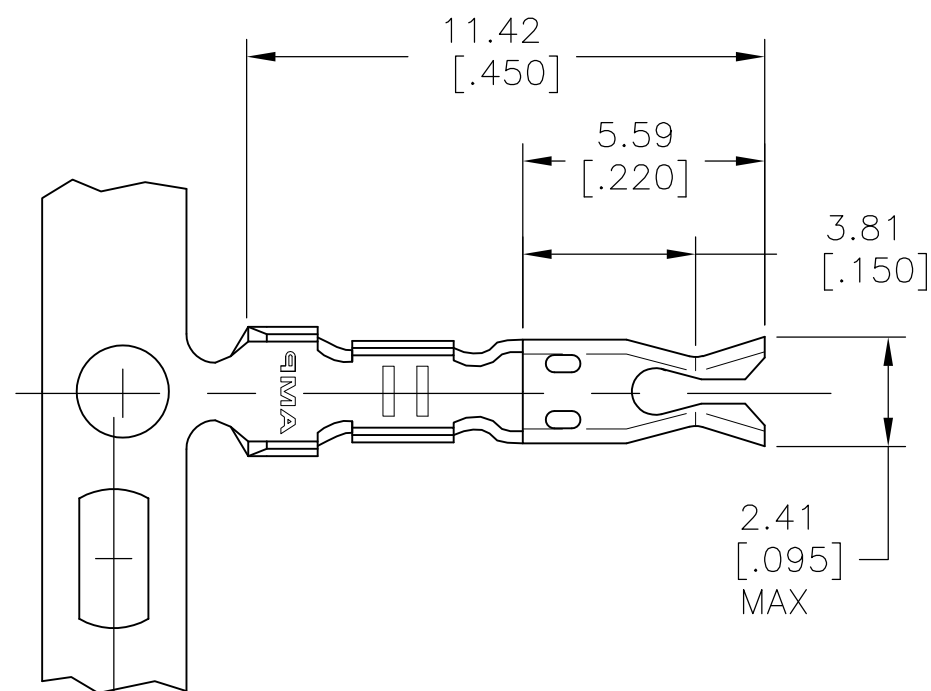

OPTIONAL DESIGNS
TO STABILIZE PIN

DIMPLES




"F" CRIMP

SECTION A-A

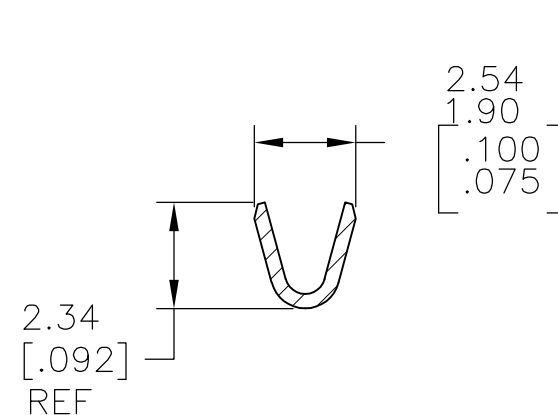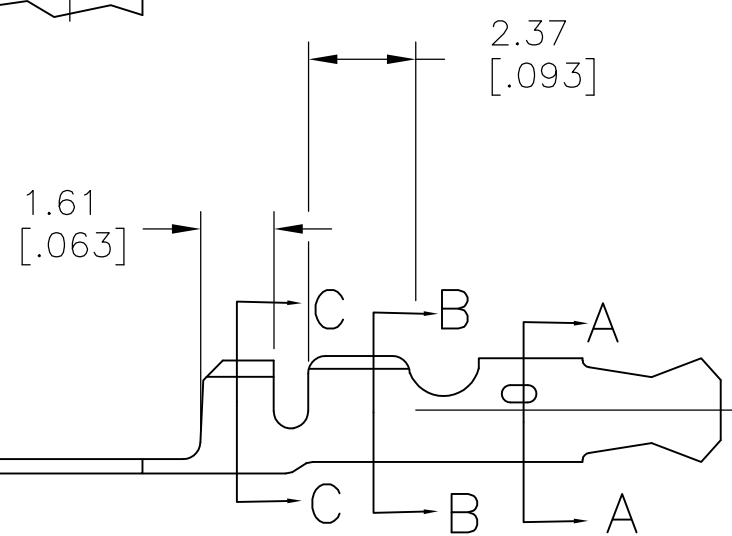


SECTION B-B

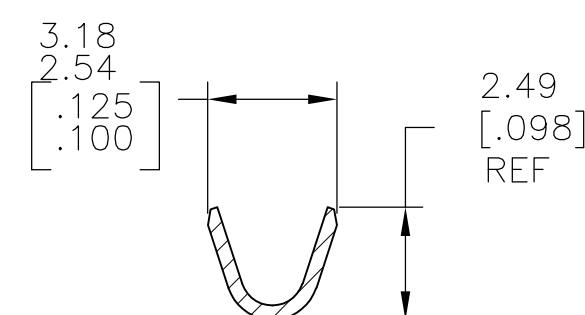

SECTION C-C

- 1 CONTINUOUS STRIP ON REELS ON 7.37[.290] CENTERS
- 2 WIRE SIZE IS 0.2 - 0.5 mm² [#24 - #20 AWG]
- 3 INSULATION RANGE IS 1.22 - 1.80 [.048 - .071] DIA
- 4 CONTACT ACCEPTS 1.02±.03[.040±.001] DIA PIN

REVERSE REEL	H04 PHOS BRONZE - SILVER PL	42428-8
REVERSE REEL	H04 PHOS BRONZE - UNPLATED	42428-6
REVERSE REEL	H04 PHOS BRONZE - TIN PL	42428-5
--	H04 PHOS BRONZE - TIN PL	42428-2
REMARKS	MATERIAL & FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN jr_ruth	18DEC07	 TE Connectivity		
		CHK DON DECKER	18DEC07			
DIMENSIONS: mm [INCHES]		APVD DON DECKER	18DEC07	NAME		
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	RECEPTACLE, PIN, 1.02[.040] DIA		
	0 PLC ± -		—			
	1 PLC ± -					
	2 PLC ± 0.38[.015]					
	3 PLC ± -		APPLICATION SPEC	SIZECAGE CODEDRAWING NORESTRICTED TO		
	4 PLC ± -		114-2083			
	ANGLES ± 5°		WEIGHT	A300779C-42428		
MATERIAL	FINISH		—			
SEE TABLE	SEE TABLE		CUSTOMER DRAWING			
			SCALE	6:1	SHEET	1 OF 1
			REV A71			