
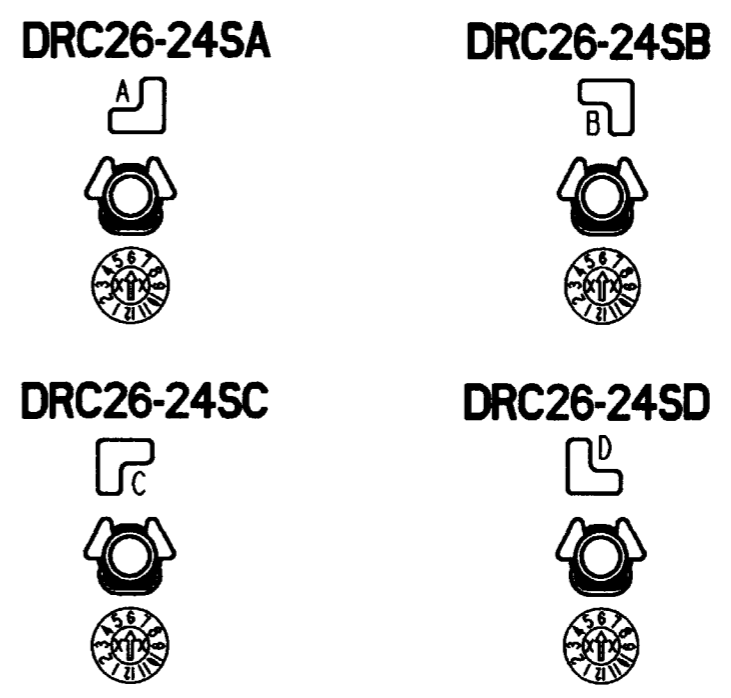



REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED
NC	NEW RELEASE PER E.O. A14752	12-5-94	R.D.R.
A	REVISED & REDRAWN PER E.O. P17011	12-22-00	R.D.R.
B	REVISED PER E.O. P18099	4-7-03	R.D.R.
C	REVISED PER E.O. P18686	9-27-04	RDR



4. THIS CONNECTOR WILL ACCOMMODATE THE FOLLOWING:

CONTACT SIZE	MIN. INSUL. O.D.	MAX. INSUL. O.D.	WIRE GAUGE RANGE REF ONLY 
20	.040 [1.016]	.095 [2.413]	16 THRU 20 [1.00-.50mm <sup>2</sup> ]

- 8. MATERIAL: HOUSING: PLASTIC (BLACK); BOLT: STAINLESS STEEL; CLIP: STEEL; GROMMET: RUBBER.
- 7. THIS PLUG MATES WITH DRC23-24P\*--\*\*\*\* RECEPTACLE. (\* = A,B,C,D KEYS; \*\*\*\* = ALL MODIFICATIONS)
-  FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS SEE ENVELOPE DRAWING 0425-015-0000.
- 5. RECOMMENDED RETAINING BOLT TORQUE: 25-28 IN-LB [2.82-3.16 NM].

NOTES: UNLESS OTHERWISE SPECIFIED

1. DIMENSIONS ARE IN INCHES [mm].
2. DIMENSION TOLERANCE: ±.025 [.64].
3. PLUG IS SUPPLIED WITH DUST CAP (NOT SHOWN).

SIGNATURE & DATE		PLUG 24 CONTACTS, SIZE 20 DRC SERIES	CP	MATL. CODE
DR	D. MEYER 11/29/00		The Deutch Company	
CHK	B. [Signature] 9/20/04		DEUTSCH I.P.D. 3850 INDUSTRIAL AVE. HEMET, CALIF. 92545	
PE	D. Meyer 9/20/04		DRC26-24S*	
APPD	R. Reed 9-27-04	ENVELOPE	DWG SIZE	CODE 11139 SHEET   OF
SCALE	NONE WT			