

SUMMARY

Wires

Low	6
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



Download

[Request a quote](#)

[Catalog](#)

Series

Termination type	Male solder
IP rating	50
Cable Ø	2.80 - 3.50 mm
Matching parts	EGG.00.306.CLL

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FG*: Straight plug, cable collet and nut for fitting a bend relief
Keying	1 key (alpha=0, plug: male contacts, receptacle: female contacts)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	∅ 2.8 - 3.5 mm
Variant	Z : Nut for fitting a bend relief

Performance

Configuration	
Insulator	L: PEEK (UL 94 / V-0/3.2, depends on material thickness)
Rated Current	

Specifications


Contact Type: Solder

Others

IP Rating: 50

DRAWINGS

Draws

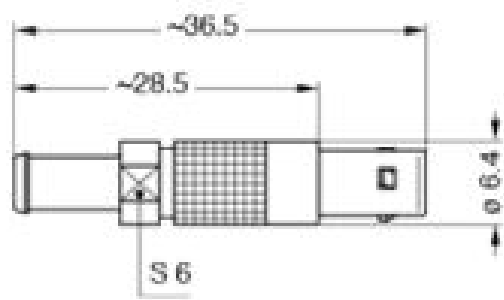

Dimensions

	A	L	M	S1	S2
mm.	6.4	28.5	20.7	5.5	6
in.	0,25	1,12	0,81	0,22	0,24

RECOMMENDED BY LEMO

Tools

Caps: BFG.00.100.PCSG

Cables