

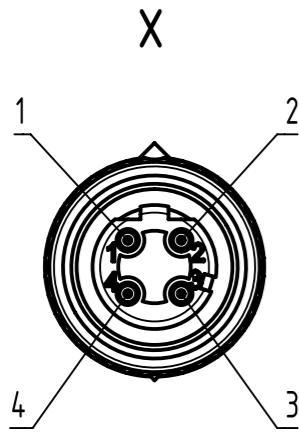


M12 D-coded 4-pole, straight overmolded female connector

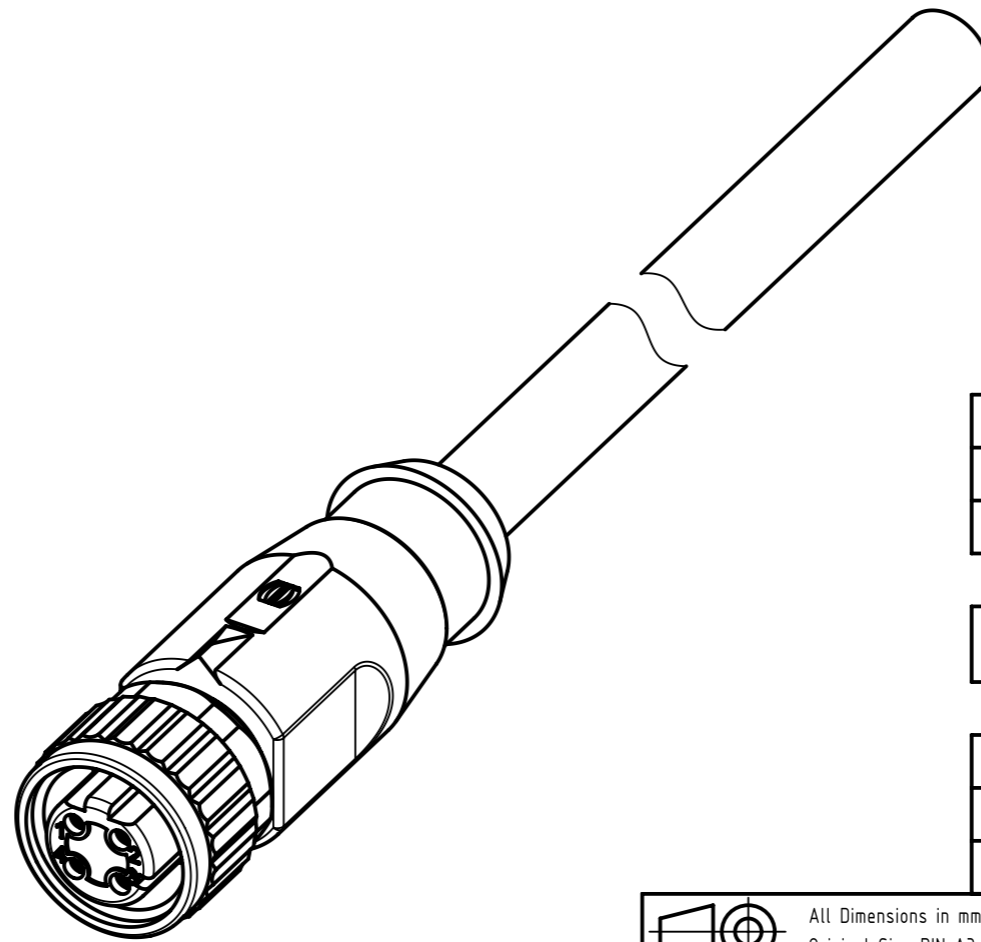

Loading-Plan:



- Protection level: IP67
 - Temperature range: -30°C ... +70°C

length in "1m" step	100	XXX=000
	99	XXX=990
	·	·
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	·	·
	·	·
Step	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

4.0 to 100	+1%
0.1 to 3.9	+0.04
a [m]	Tolerance

Part no.	213493004XXXXX
----------	----------------

Type of cable	XX
PVC, green, 4xAWG22/7	XX=05
PUR, green, 2x2xAWG22/7	XX=77

All rights reserved Department EC PD - RO HARTING Electronics GmbH D-32339 Espelkamp	All Dimensions in mm Original Size DIN A3	Scale 2:1	Free size tol.	Ref. Sub.
	Created by MUNTEANV	Inspected by AVRAM	Standardisation HOFFMANN	Date 2015-11-27
Title M12 D-coded Cable Assembly		Doc-Key / ECM-Nr. 100588482/UGD/000/B 50000097719		Rev. B
Type TB		Number 213493004XXXXX		Page 1/1