


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

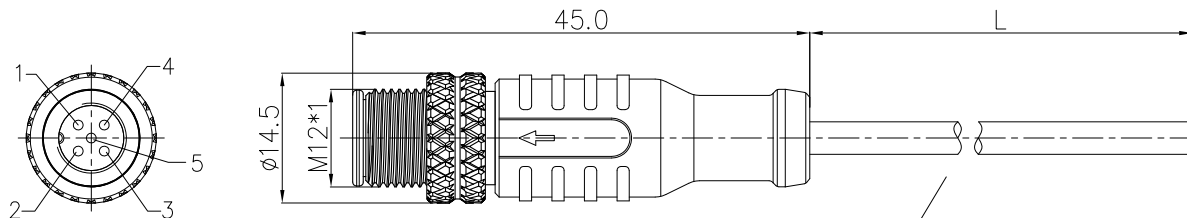

Cable length: make to order

Detailed product Description:

1. Waterproof connector rating is IP65/IP67
2. Protected from dust and water during immersion, resistant to many oils and chemical etc
3. Wire cross section: 0.25mm²

Electrical character:


1. Rating voltage: 60V AC/DC
2. Insulation resistance: >100MΩ
3. Rating current: 4A
4. Contact resistance of the connector ≤ 10 mΩ

Other Specification:

1. Contact PIN: Phosphor Copper with Gold plating
2. Coupling nut/screw: Brass with nickel plating
3. Insulation plastic: PA66+GF and TPU
4. Degree of protection: IP65/67
5. Operating temperature: -25℃~+85℃

Electrical character

Prat Number	Contacts	Rated Voltage		Rated Current	Contact Resistance
		A/C	D/C		
SM12-CVT-A3M-2Axxx		250V	250V	4A	10mΩ
SM12-CVT-A4M-2Axxx		250V	250V	4A	10mΩ
SM12-CVT-A5M-2Axxx		60V	60V	4A	10mΩ
SM12-CVT-A8M-2Axxx		30V	30V	2A	10mΩ
SM12-CVT-A12M-2Axxx		30V	30V	1.5A	10mΩ
SM12-CVT-B5M-2Axxx		60V	60V	4A	10mΩ
SM12-CVT-D4M-2Axxx		250V	250V	4A	10mΩ

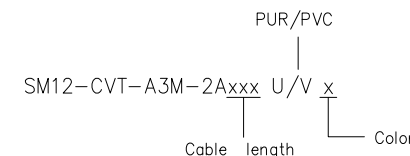

Cable Color

Color	NO.	Explain
black	0	abridge
yellow	1	
gray	2	

DETACHED LISTS	PART NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: Alam 9/10/15"	NAME: SM12-CVT-XXM-2AXXX		
	CHKD: Aaron 9/2/15"	TITLE: CUSTOMER DRAWING		
	DRFT: CKZ 01/11/15"	REV	DO	
		DRAWING NO.: SM12-CVT-AXM-2A	SHEET	1/1
THIRD ANGLE PROJECTION		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1