

**M12 FEMALE 90° B CODED SHIELD WIREABLE SCREW TERM.**5 POLE max. 0.75mm<sup>2</sup> 6-8mm PROFIBUS

PROFIBUS, Interbus

Female 90°


M12, 5-pole

B-coded


shielded



Screw terminals

Sealing range (cable Ø): 6...8 mm

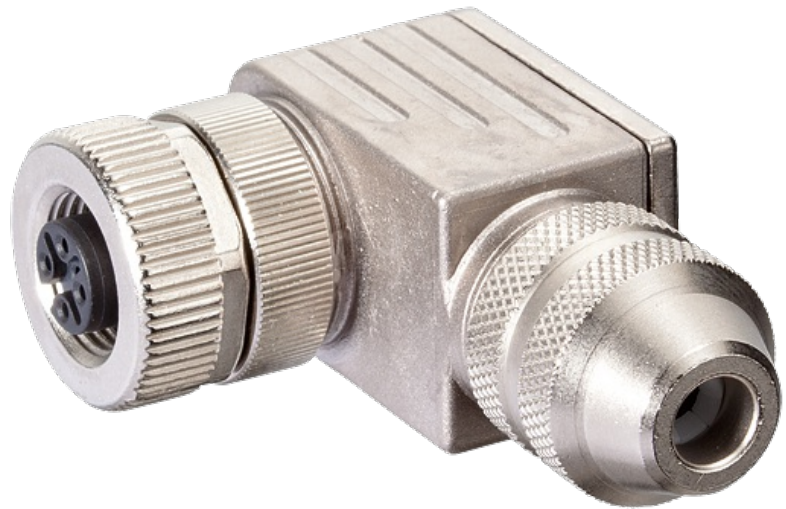[Link to Product](#)**Illustration**

Female

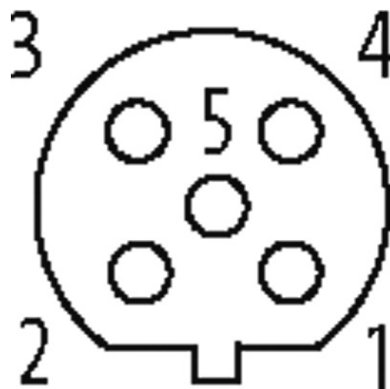

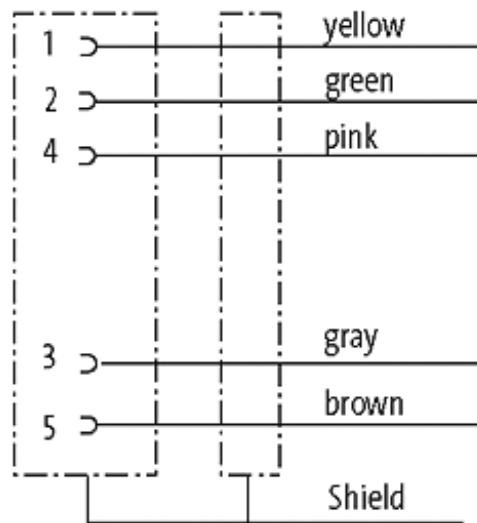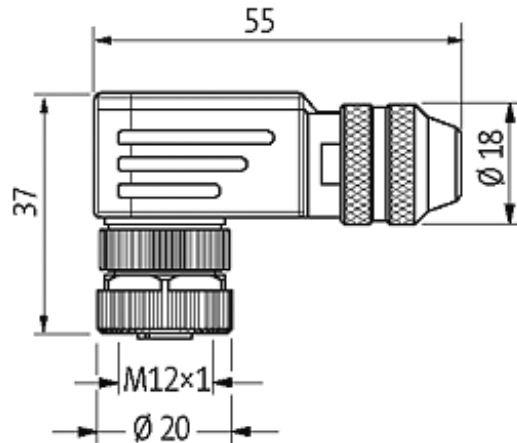

Product may differ from Image

**Form**

Form 14031

**Technical Data**

Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	max. 0.75 mm <sup>2</sup>
Sealing range (cable Ø)	6...8 mm
Protection	IP67 inserted and tightened (EN 60529)
Housing	Brass, nickel plated

**General data**

Temperature range -40...+85 °C

**Commercial data**

country of origin	DE
customs tariff number	85369010
EAN	4048879198608
eClass	27279221

Packaging unit

1