

MOSA M8 MALE 0° FIELD-WIREABLE (IDC)

3-pol., 0,14-0,34mm²

Male straight


3-pole


Insulation displacement technology

Connection cross section: 0.14...0.34 mm²

[Link to Product](#)

Illustration

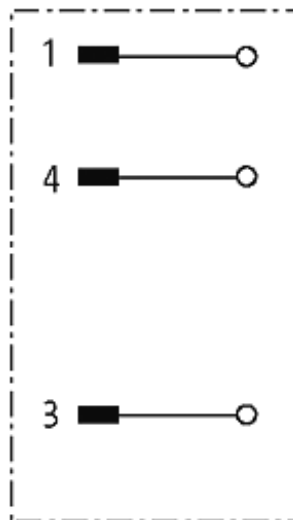

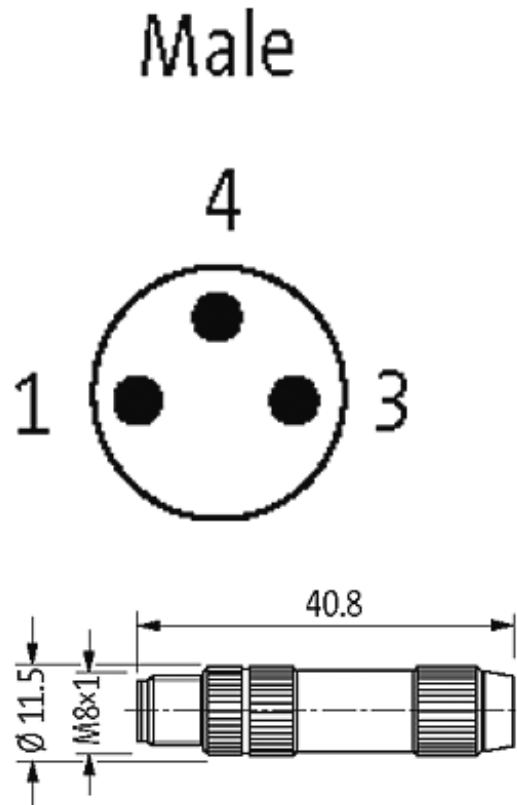

Product may differ from Image

Approvals



Form

Form 08331

Technical Data

Operating voltage	max. 32 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	0.14...0.34 mm ² (conductor diameter min. 0.1 mm)
Sealing range (cable Ø)	2.5...5.1 mm (gasket included)
Wire isolation	PVC, PP, TPE
Outer wire Ø	1.0...1.6 mm
Protection	IP67 inserted and tightened (EN 60529)

General data

Temperature range -25...+85 °C

Commercial data

country of origin	DE
customs tariff number	85369010
minimum order quantity	1

