

M8 MALE 0° FIELD-WIREABLE (SOLDER PINS)

3-pol. 0.25mm²

Male straight


3-pole


with solder pins

Connection cross section: max. 0.25 mm²

[Link to Product](#)

Illustration

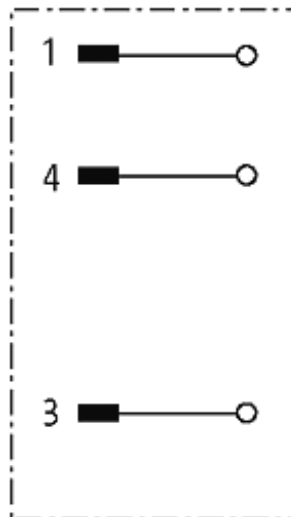

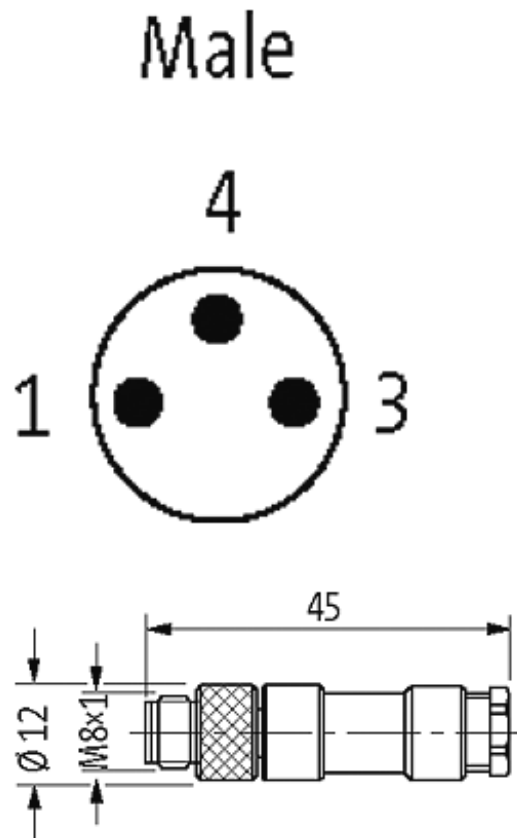

Product may differ from Image

Approvals



Form

Form 08401

Technical Data

Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	max. 0.25 mm ²
Sealing range (cable Ø)	3.5...5.0 mm
Protection	IP67 inserted and tightened (EN 60529)

General data

Temperature range	-25...+85 °C
Dimensions H × W × D	45×12×12 mm

Commercial data

country of origin	DE
customs tariff number	85369010
minimum order quantity	1