


REV. A	ECN NO.	DATE	SIGN	DESCRIPTION
	Initial Release	2010/04/22	Jessie	Form Rev.03 To A

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

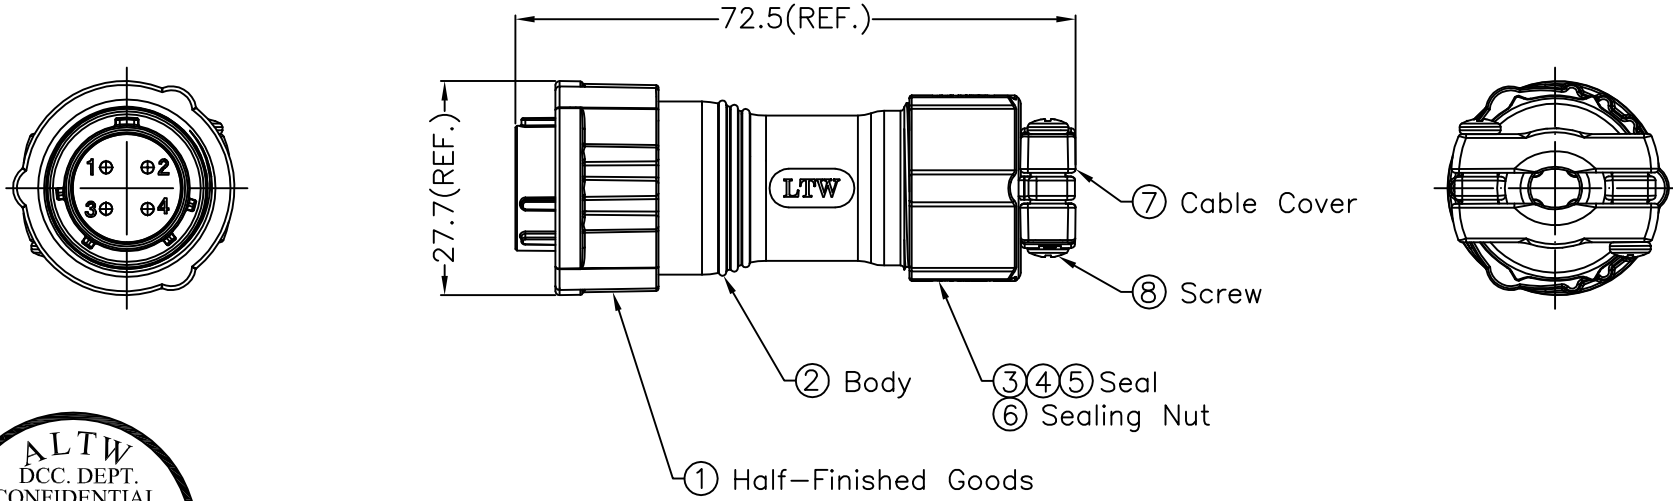

ALTW
DCC. DEPT.
CONFIDENTIAL
2010.06.09
ISSUED

ALTW
CONFIDENTIAL
2010.04.22
R&D DEPT.

- Note:
- * @C Important Dimension
 - * Waterproof Rate: IP68
IP68: 1M depth of water in 24 Hrs.
(防水等級：IP68)
IP68: 水深一米測試 24 小時
 - * Cable OD: $\phi 5.5\text{mm} \sim \phi 12.5\text{mm}$
 - * Gasket: Silicone ,Gray
 - * Shell: Zinc Alloy ,Electrodeposition Coating ,Black.
 - * Male Pin: Copper Alloy ,Gold Plated
 - * Insulation: Nylon ,Black
 - ⑨ * One Set Assembled in one PE Bag.

UNIT:mm		TITLE Circular II Series 4 Pin Assy	Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO HB20-04BFMA-SL8001	DRAWN BY Jessie	DATE 2010/04/22
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE Free	SHEET 1 OF 1	SHEET 1 OF 1		DWG NO HB20-04BFMA-SL8001	CHECKED BY Jimmy	DATE 2010/05/12
REV. A	SIZE A4	⑨ :Inspection Item		CUSTOMER ALTW	APPROVED BY Win	DATE 2010/05/12	8 FMW0702-01-01A2