


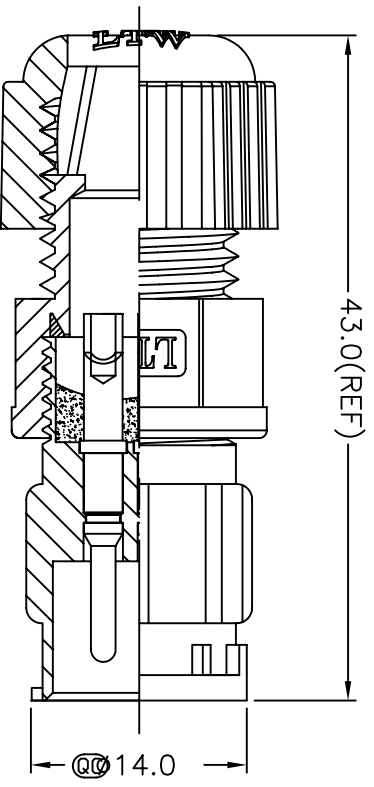


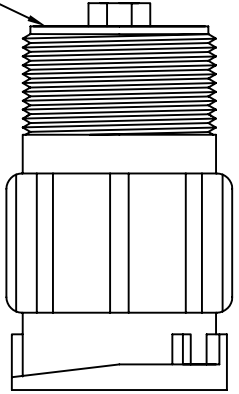



1	2	3	4	5	6	7	8
REV.	EGN NO.	DATE	SIGN	DESCRIPTION			

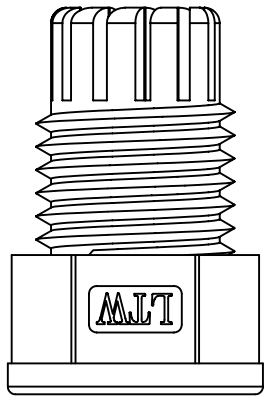

Pin Assignments  
Front View 前視圖



NOTE:

- \* Waterproof Rate : IP67
- \* Ⓒ Important Dimension To Check.  
( Ⓒ 為重點檢驗尺寸 )
- \* Seals for Cable OD:  $\phi 4.5\text{mm} \sim \phi 6.5\text{mm}$   
( 防水墊圈線徑 :  $4.5\text{mm} \sim \phi 6.5\text{mm}$  )
- \* One Set Unassembled in One PE Bag  
( 每一組未組裝, 放置於一個 PE 袋, 並封口 )
- \* Housing: Black, Nylon+GF
- \* Pin: Copper Alloy, Gold Plated
- \* Gasket: Black, EPDM
- \* Seals: Black, EPDM
- \* Clamp Ring: Black, Nylon
- \* Sealing Nut: Black, Nylon
- \* Liquid Glue: Clear

UNIT: mm		TITLE		ITEM NO		DRAWN BY		DATE	
TOLERANCE		STANDARD ASSY LOCK 3P M CONN M PIN		LTW/BB-03BMMA-LL 7001		Tina		2006/05/19	
.X	±0.25	SCALE	F ree	SHEET	1	CHECKED BY	Z.Ting	DATE	2006/06/09
.XX	±0.1	REV.	A	SIZE	A4	APPROVED BY	lvgn	DATE	2006/08/02
.XXX	±0.05	CUSTOMER							
ANGLES	±1°	亮泰企業股份有限公司							
1	2	3	4	5	6	7	8	8 QP020-01-01A1	